

MEGAMARINE

ES

Montaje: Adosado mediante lira.
Fuente de luz: PHILIPS LUXEON 5050.
 Temperatura de color 5000K.
 Disponible, 3000K, 4000K, 6000K.
Sistema óptico: Reflector simétrico 30° (estándar).
 Disponible, 60°, 90° o ASYM°.
Distribución luminosa: Directa.
Equipo eléctrico: Equipo de control electrónico. PF>0,95.
 Meanwell HLG.
Materiales: Cuerpo: Fundición de aluminio LM6 + AKZO NOBEL
 de muy alta disipación térmica. **Recubrimiento anticorrosivo
 C5-M MARINE** según ISO 12944.
Acabado: Color gris con superficies rectificadas para garantizar
 una buena conducción térmica entre el módulo LED y el cuerpo.




EN


Mounting: Surface using bracket.
Light source: PHILIPS LUXEON 5050.
 Temperature color 5000K.
 Available, 3000K, 4000K, 6000K.
Optical system: Symmetric reflector 30° (standard).
 Available, 60°, 90° or ASYM°.
Light distribution: Direct.
Electrical equipment: Electronic control gear. PF>0,95. Meanwell HLG.
Materials: Body: Die-cast aluminum LM6 + AKZO NOBEL of very high
 thermal dissipation. **C5-M MARINE anticorrosive coating** according to
 ISO 12944.
Surface finish: Grey color with rectified surface to ensure good heat
 conduction between the LED module and body.




ESTANDAR | STANDARD
30°




60°




90°



ASYM





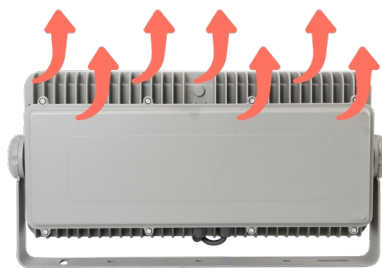


DISIPADORES DE CALOR DE ALTO RENDIMIENTO
HIGH PERFORMANCE HEATSINK




180° ROTACION
ROTATION

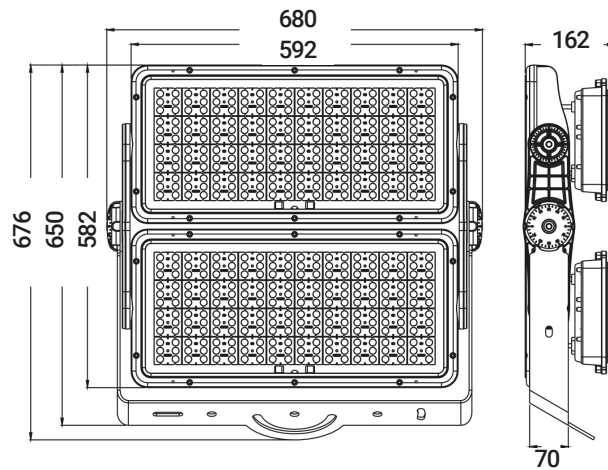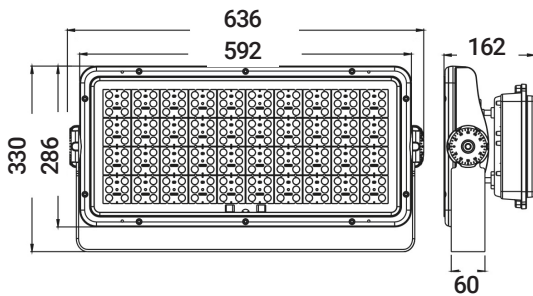

ESTANDAR/STANDARD

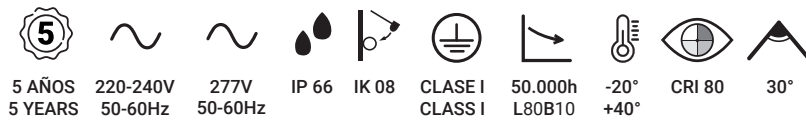

DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
MMN4180KG	MEGAMARINE/30°-L-IP66-480W 80000Lm/850	16	480W	80000	167 lm/W	5000
MMN811C6G	MEGAMARINE/30°-XL-IP66-960W 160000Lm/850	36	960W	160000	167 lm/W	5000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI T.COLOR 3000K, 4000K, 6000K OPTICA/LENS 60°, 90°, ASYM