


MULTIDIRECTIONALS LED ROTAX/C DUO




ROTAX/C DUO

Mounting	Recessed.
Light source	LED
Optical system	Faceted reflector. Beam angle 40°.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A+). PF>0,95 TRIDONIC. Possibility of incorporating dimmable electronic control gear (DALI). Under request, emergency Kit (1 or 3 hours).
Material	Body: Steel sheet + extruded aluminum. Reflector: Faceted anodized aluminum.
Surface finish	Body: Black colour.
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. L80B10. No maintenance required. Careful with the environment, it does not contain mercury.



ROTAX/C DUO

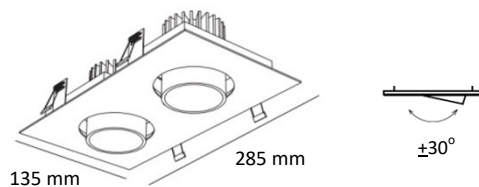

REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Colour temperature CCT (K)	DIMM DALI
ROTAX/C DUO/40° 53W 6360lm/840 Available colour temperature 3000K.	(2,2)	6360	53	120	4000	✓