
















High-Bay Industrial Luminaires





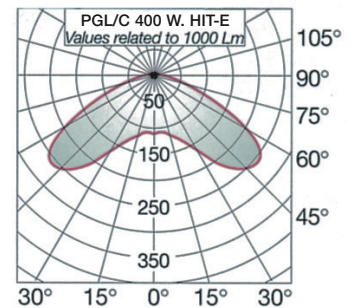


 HM-E 250/400W
 HST-E 250/400W
 HIT-E 250/400W
 PL-H 60W
 PL-H 85W

- Die-cast aluminium equipment box with cooling fins, stainless steel external screws and zinc coated suspension hook. Painted in epoxy powder coating. Grey colour.
- Reflector in 99.80% pure aluminium, oxidized anode-process polished for a high light output.
- When glass is required we supply the reflector including inox clips for fixing the glass.
- Tempered glass, heat resistant shock-proof with silicone rubber sealing gasket.



PGL/C-IP54 - 250 V.M. (250W. V.M.) + GLASS
PGL/C-IP54 - 400 V.M. (400W. V.M.) + GLASS
PGL/C-IP54 - 250 H.P.S. (250W. H.P.S.) + GLASS
PGL/C-IP54 - 400 H.P.S. (400W. H.P.S.) + GLASS
PGL/C-IP54 - 250 H.I.T. (250W. H.I.T.-E) + GLASS
PGL/C-IP54 - 400 H.I.T. (400W. H.I.T.-E) + GLASS
PGL/C-IP54 - 60 PL-H (60W. PL-H)
PGL/C-IP54 - 85 PL-H (85W. PL-H)

Other options:



Electrical equipment and lamp PL-H