

## DTM-IP44-195



**LUMINAIRE HOUSING:** Made of high quality 0,6 mm trimmed, galvanized steel sheet. The Control Gear unit comes on Gear Tray (option A) or in a galvanized Metal Box (option B). White flange rounded ring made in enamelled steel sheet with thermo-hardened



UV resistant powder coat. Installation using tension clips. WIELAND connector is optional. According to Norm ENEC-10/VDE.

**OPTIC:** High specular polished reflector made of pure aluminium, silver coated by vapour deposition. Reflector is precision formed to render very high light efficiency. Opal glass ( Sand Blasted ) is included.

- DTM-IP44-195 - 1x13W - 230V
- DTM-IP44-195 - 1x18W - 230V
- DTM-IP44-195 - 1x26W - 230V
- DTM-IP44-195 - 2x13W - 230V
- DTM-IP44-195 - 2x18W - 230V
- DTM-IP44-195 - 2x26W - 230V



**DTM-IP44-195 1x13 W.**

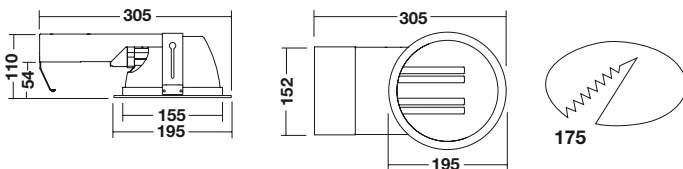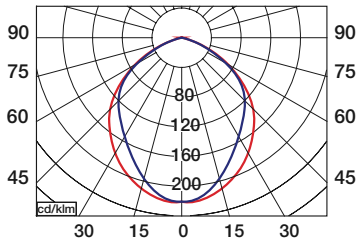

**Mounting**

