

RECESSED DOWNLIGHTS



DL



Compact Design, horizontal position for lamps TC-D/TC-DEL.

Open reflector for maximum output in luminous intensity.

LUMINAIRE HOUSING: Made of high quality 0,6 mm trimmed, galvanized steel sheet. White flange ring made in enamelled steel

sheet with thermo-hardened UV resistant powder coat. Installation using tension clips. WIELAND connector is optional.

According to Norm ENEC-10/VDE.

OPTIC: High specular polished reflector made of pure aluminium, silver coated by vapour deposition.

Reflector is precision formed to render very high light efficiency.



DL: Transparent glass

DLM: Opal glass (Sand Blasted)


DL-195




DL-195 1x13 W.

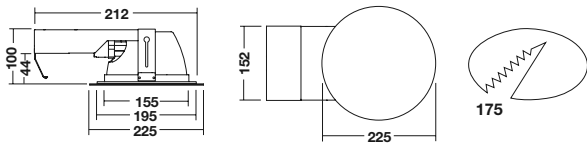

- DL-195 - 1x13W - 230V
- DL-195 - 1x18W - 230V
- DL-195 - 1x26W - 230V
- DL-195 - 2x13W - 230V
- DL-195 - 2x18W - 230V
- DL-195 - 2x26W - 230V



DLM-195

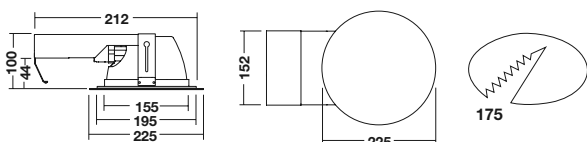

- DLM-195 - 1x13W - 230V
- DLM-195 - 1x18W - 230V
- DLM-195 - 1x26W - 230V
- DLM-195 - 2x13W - 230V
- DLM-195 - 2x18W - 230V
- DLM-195 - 2x26W - 230V

