


RECESSED DOWNLIGHTS





CRT



LUMINAIRE HOUSING: Made of high quality 0,6 mm trimmed, galvanized steel sheet. The Control Gear unit comes on Gear Tray (option A) or in a galvanized Metal Box (option B). White flange rectangular ring made in enamelled steel sheet with thermo-hardened UV resistant powder coat.


Installation using tension clips. WIELAND connector is optional. According to Norm ENEC-10/VDE.

OPTIC: High specular polished reflector made of pure aluminium, silver coated by vapour deposition. Reflector is precision formed to render very high light efficiency.

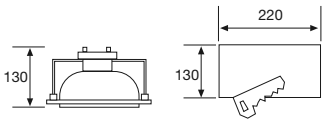

CRT-70 W - 230V HIT-DE
CRT-150 W - 230V HIT-DE

CRT-150 W. HIT-DE

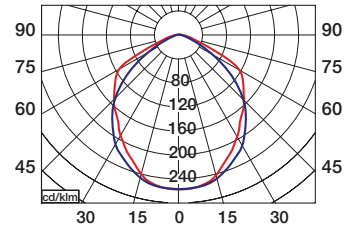

DTM



LUMINAIRE HOUSING: Made of high quality 0,6 mm trimmed, galvanized steel sheet. The Control Gear unit comes on Gear Tray (option A) or in a galvanized Metal Box (option B). White flange rounded ring made in enamelled steel sheet with thermo-hardened


UV resistant powder coat. Installation using tension clips. WIELAND connector is optional. According to Norm ENEC-10/VDE.

OPTIC: High specular polished reflector made of pure aluminium, silver coated by vapour deposition.

Reflector is precision formed to render very high light efficiency. Opal Glass (sand blasted) heat resistant glass is included



OPTION A

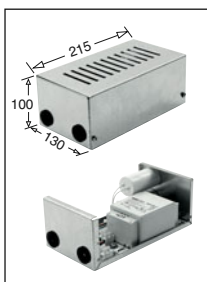

OPTION B



DTM-70 W - 230V HIT-DE (Rx7s)
DTM-150 W - 230V HIT-DE (Rx7s)
DTM/G12-70 W - 230V HIT-CE (G12)
DTM/G12-150 W - 230V HIT-CE (G12)

DTM-70 W. HIT-DE

