


exclusive Range RECESSED DOWNLIGHTS *Lux-May*

LUXUS




LUMINAIRE HOUSING: Made of high quality 0,6 mm trimmed, galvanized steel sheet. White (standard), grey (optional)
 Square ring made in enamelled steel sheet with thermo-hardened UV resistant powder coat.

Installation using tension clips. WIELAND connector is optional.
 According to Norm ENEC-10/VDE.

OPTIC: Double parabolic high specular faceted polished reflector made of pure aluminium, silver coated by vapour deposition. Covered by transparent glass.

Reflector is precision formed to render very high light efficiency.


LUXUS 243/BR - 2x26W





LUXUS 243/BR LUXUS 269/BR



DIMENSIONS

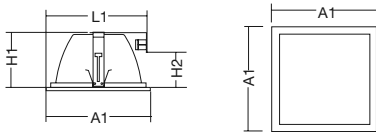

MOUNTING

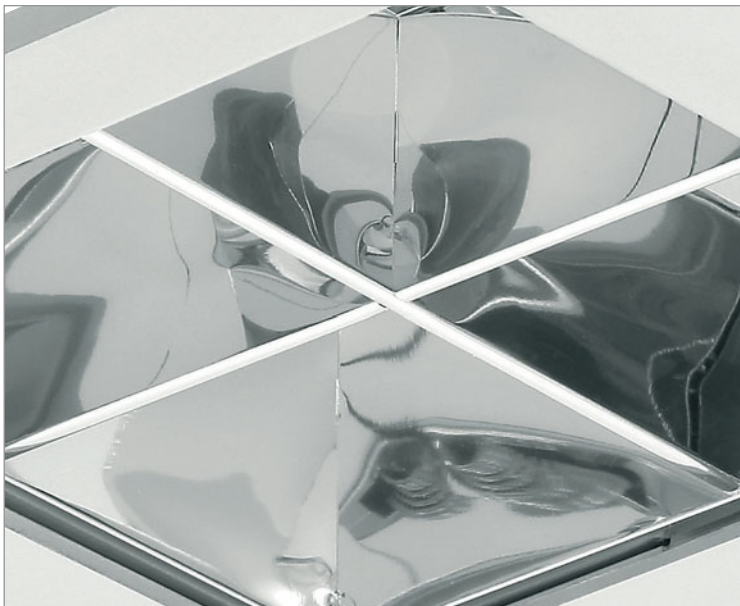

	W.	Lamp	Dimensions			Hole	
			A1	L1	H1	H2	O1 O2
exclusive LUXUS - 243/BR	1 x 13	TC-DEL	243	253	148	70	231 231
exclusive LUXUS - 243/BR	1 x 18	TC-DEL	243	253	148	70	231 231
exclusive LUXUS - 243/BR	1 x 26	TC-DEL	243	253	148	70	231 231
exclusive LUXUS - 243/BR	2 x 13	TC-DEL	243	253	148	70	231 231
exclusive LUXUS - 243/BR	2 x 18	TC-DEL	243	253	148	70	231 231
exclusive LUXUS - 269/BR	1 x 18	TC-DEL	270	280	162	110	257 257
exclusive LUXUS - 269/BR	1 x 26	TC-DEL	270	280	162	110	257 257
exclusive LUXUS - 269/BR	1 x 32	TC-TEL	270	280	162	110	257 257
exclusive LUXUS - 269/BR	1 x 42	TC-TEL	270	280	162	110	257 257
exclusive LUXUS - 269/BR	2 x 18	TC-DEL	270	280	162	110	257 257
exclusive LUXUS - 269/BR	2 x 26	TC-DEL	270	280	162	110	257 257
exclusive LUXUS - 269/BR	2 x 32	TC-TEL	270	280	162	110	257 257