

EMERGENCY FITTINGS



E-3000





LUMINAIRE HOUSING: Made of injected ABS.

DIFFUSER: Made of injected polycarbonate.
WIRING: Overcharging and discharging battery protection. Ni-Cd batteries. Test button - to check the operation of the emergency circuit of the device. Indication LED. Produced in accordance with EN 60598-1, EN 60598-2-22.

ACCESORIES: Box for recessed + metal springs.

	W.	Lamp	Duration	Light output	A1	L1	H1	Y
EMERGENCY E-3000	6 W.	T5	1,5 h.	50 Lm	48	270	117	150
EMERGENCY E-3000	8 W.	T5	1,5 h.	85 Lm	48	270	117	150
<i>PICTOGRAMS INCLUDED</i>				<i>(non maintained)</i>				
<i>BOS FOR RECESSED</i>				25 340 120 -				

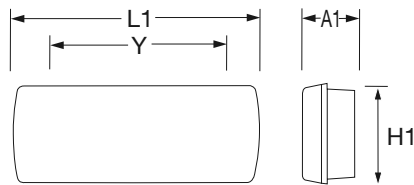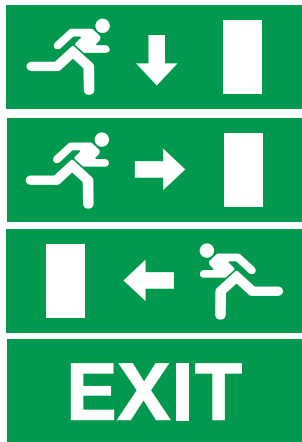


E-4000L



LUMINAIRE HOUSING: Body is made of aluminium profile.

DIFFUSER: Diffuser is made of plexiglass.

WIRING: Overcharging and discharging battery protection. Ni-Cd batteries. Special high luminosity (white colour) LEDs. Long life duration of LEDs (11 years). Low consumption, long emergency duration. Produced in accordance with EN 60598-1, EN 60598-2-22. Test button - to check the operation of the emergency circuit of the device.

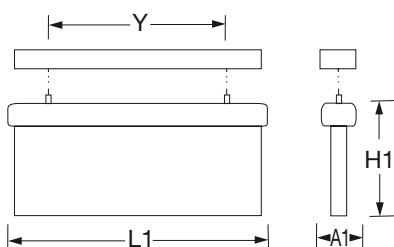

	Consumption	Lamp	Duration	Luminous intensity	A1	L1	H1	Y
EMERGENCY E-4000L	5 W.	8 LEDs	3 h.	440 mcd, 120°	15	280	120	233
<i>PICTOGRAMS INCLUDED</i>				<i>(maintained)</i>				