


Recessed Low Luminance Luminaires for T-5 Lamp



LUMINAIRE HOUSING: Made in white, stoved steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm ENEC-10/VDE. Minted, punched and folded before the painting treatment.




PAINTING: In white epoxi-polyester, in robotic cabin with dust polymerization in continuous ovens at 180°, previous to degreasing and microcrystalline phosphatizing. Stable to the ultraviolet radiations and yellowing process.

BRIGHT OPTIC: Double parabolic V-Shaped reflectors made of pure aluminium polished and anodized with a high specular 316 G2 finish. This anti-iridescent optic renders a "DARKLIGHT" effect and a homogeneous light projection. Renders high performance and low luminance level cut-off at $60^\circ < 200\text{cd/m}^2$.

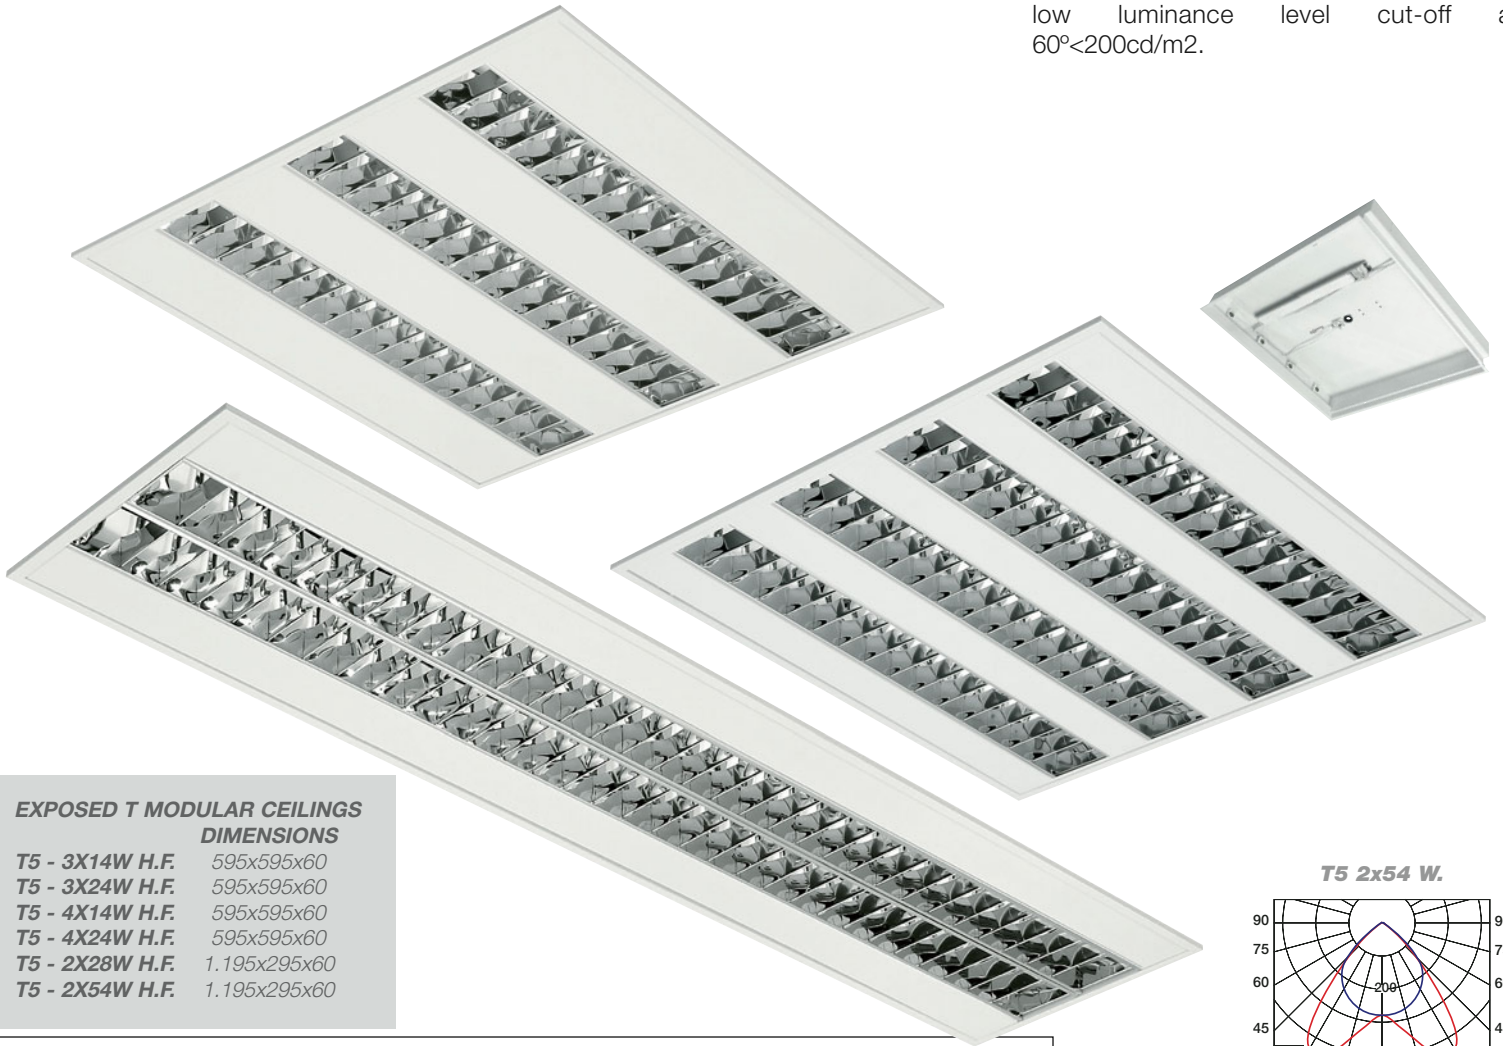

EXPOSED T MODULAR CEILINGS
DIMENSIONS

T5 - 3X14W H.F.	595x595x60
T5 - 3X24W H.F.	595x595x60
T5 - 4X14W H.F.	595x595x60
T5 - 4X24W H.F.	595x595x60
T5 - 2X28W H.F.	1.195x295x60
T5 - 2X54W H.F.	1.195x295x60

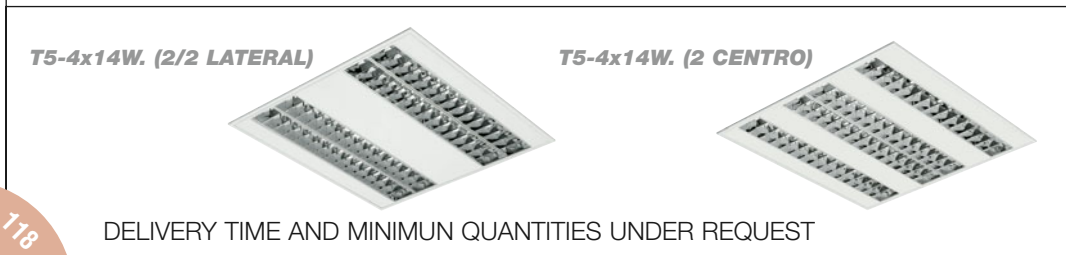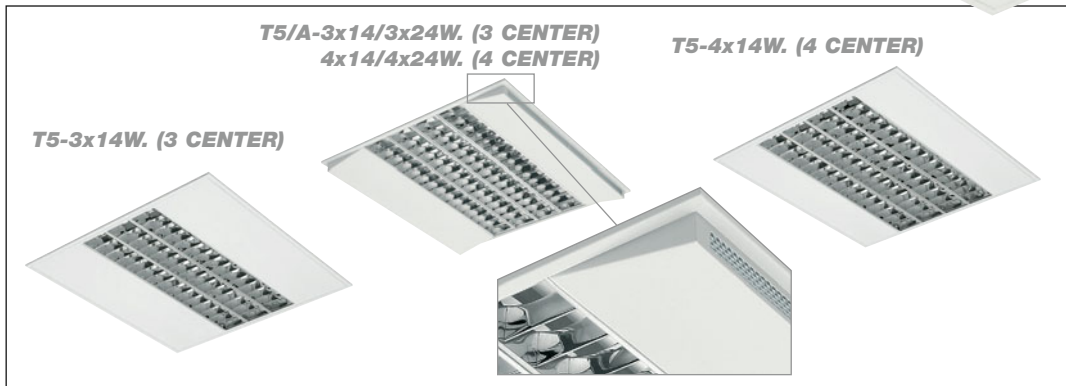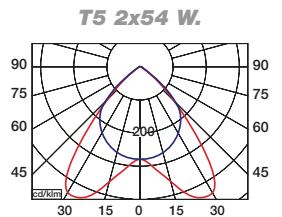

PLASTER CEILINGS DIMENSIONS

T5-PTE - 3X14W H.F.	620x620x60
T5-PTE - 3X24W H.F.	620x620x60
T5-PTE - 4X14W H.F.	620x620x60
T5-PTE - 4X24W H.F.	620x620x60
T5-PTE - 2X28W H.F.	1.216x318x58
T5-PTE - 2X54W H.F.	1.216x318x58

PLASTER CEILINGS
(under request) 590x590 mm.
Four adjustable mounting brackets are included for fixing on ceiling

DELIVERY TIME AND MINIMUM QUANTITIES UNDER REQUEST