

Recessed Low Luminance Luminaires for T-5 Lamp



LUMINAIRE HOUSING: Made in white, stoved steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm ENEC-10/VDE. Minted, punched and folded before the painting treatment.

PAINTING: In white epoxi-polyester, in robotic cabin with dust polymerization in continuous ovens at 180°, previous to degreasing and microcrystalline phosphatizing. Stable to the ultraviolet radiations and yellowing process. T-8 chassis with T-5 accesories.



OPTIC: Double parabolic brht louvre anodized and polished glare free (Dark-light), low luminance category II.

ACCESSORIES: Upper mirror reflectors behind tubes, under request.


T5/BR



EXPOSED T MODULAR CEILINGS
T5/BR - 4X14W H.F. 595x595x90
T5/BR - 4X24W H.F. 595x595x90



T5-PTE/BR

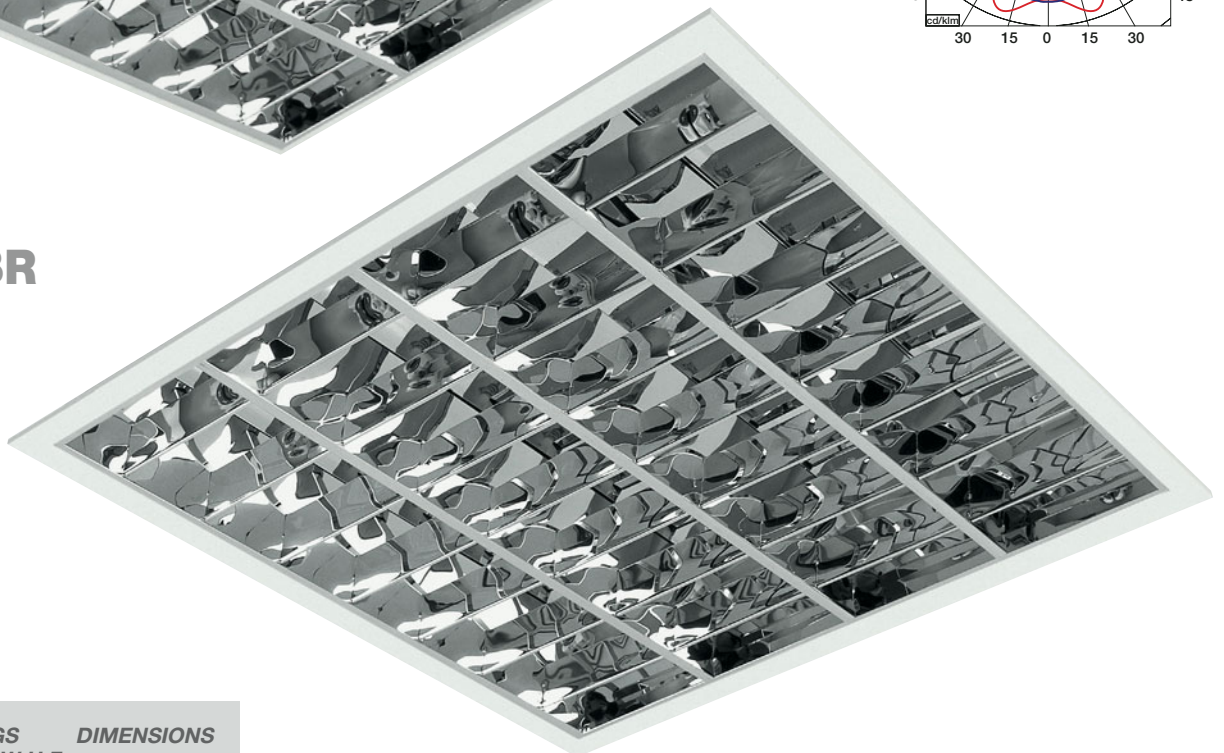

PLASTER CEILINGS	DIMENSIONS
T5-PTE/BR - 4X14W H.F.	620x620x90
T5-PTE/BR - 4X24W H.F.	620x620x90

PLASTER CEILING
 (under request) 590X590 mm.
 Four adjustable mounting brackets are included for fixing on ceiling