

T5



Recessed Low Luminance Luminaires for T-5 Lamp




LUMINAIRE HOUSING: Made in white, stoved steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm ENEC-10/VDE. Minted, punched and folded before the painting treatment.

PAINTING: In white epoxi-polyester, in robotic cabin with dust polymerization in continuous ovens at 180°, previous to degreasing and microcrystalline phosphatizing. Stable to the ultraviolet radiations and yellowing process. T-8 chassis with T-5 accesories.


OPTIC: Mat finish anodised aluminium (Alanod-1100G) double parabolic louvre equipped with 4 clamping springs.

ACCESSORIES: Upper mirror reflectors behind tubes, under request.


T5/MR

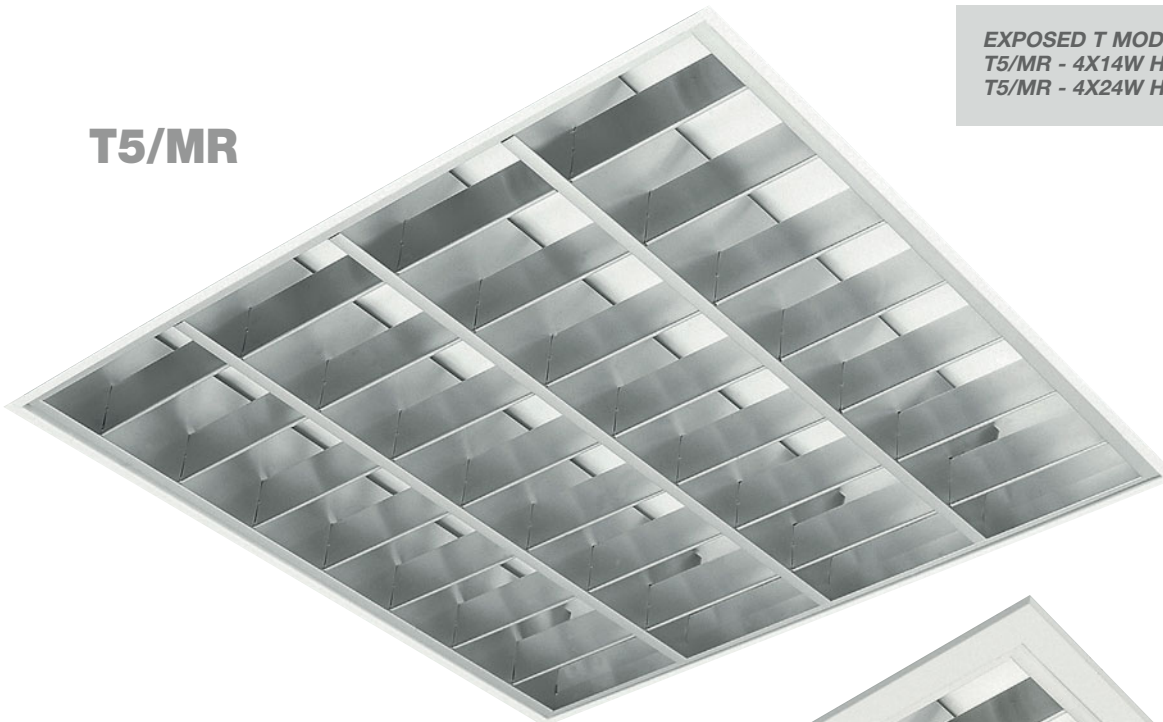


EXPOSED T MODULAR CEILINGS	DIMENSIONS
T5/MR - 4X14W H.F.	595x595x90
T5/MR - 4X24W H.F.	595x595x90

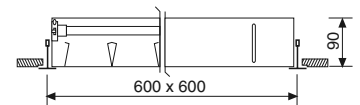

T5/MR 4x14 W.

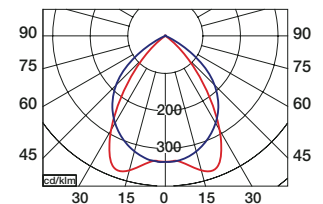

T5-PTE/MR

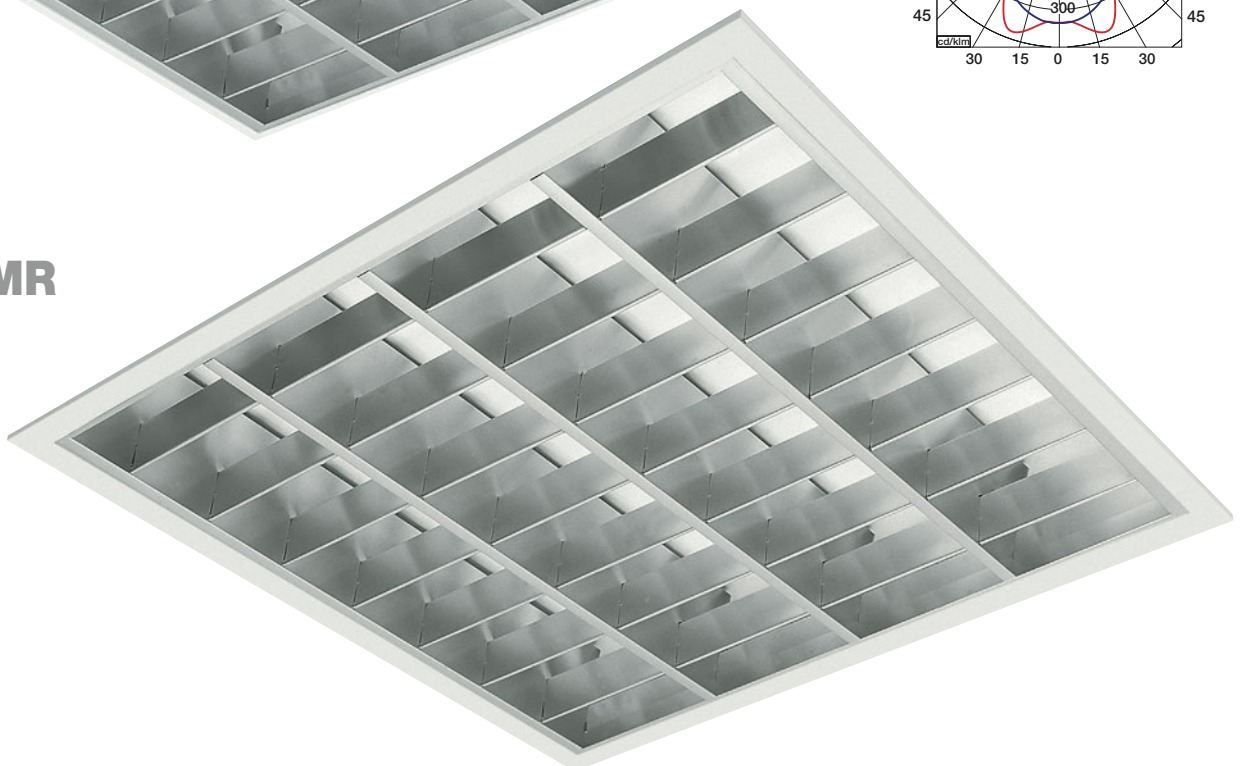

PLASTER CEILINGS	DIMENSIONS
T5-PTE/MR - 4X14W H.F.	620x620x90
T5-PTE/MR - 4X24W H.F.	620x620x90

PLASTER CEILING
(under request) 590X590 mm.
Four adjustable mounting brackets are included for fixing on ceiling

