

Recessed Low Luminance Luminaires for T-5 Lamp



LUMINAIRE HOUSING: Made in white, stoved steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm UNE-36.086-91 (EN-10130). Minted, punched and folded before the painting treatment.

PAINTING: In white epoxy-polyester, in robotic cabin with dust polymerization in continuous ovens at 180°, previous to degreasing and microcrystalline phosphatizing. Stable to the ultraviolet radiations and yellowing process.


ACCESSORIES: Brackets for plaster ceilings, under request.

T55/UMBR

OPTIC: Double parabolic high bright louvre, cat II, with perimetral finish decorative frame for embellishment. Anodized and polished aluminium, glare free. Double parabolic cross blades (transversals) are in high bright, the flat plates are in white microperforated.



	Dimensions	Ceiling Module	Hole Ceiling
T55/UMBR - 4X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UMBR - 3X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UMBR - 4X24W H.F.	595x595	600x600	575x575
T55/UMBR - 3X24W H.F.	595x595	600x600	575x575
T55/UMBR - 4X14W H.F.	595x595	600x600	575x575
T55/UMBR - 3X14W H.F.	595x595	600x600	575x575
T55/UMBR - 2X28W H.F.	1.195x295	1.200x300	1.175x275

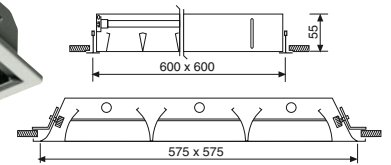

T55/UMMR

OPTIC: Double parabolic mat-satinated louvre, cat II, with perimetral finish decorative frame for embellishment. Anodized and polished aluminium, glare free. Double parabolic cross blades (transversals) are in mat-satinated, the flat plates are in white microperforated.



	Dimensions	Ceiling Module	Hole Ceiling
T55/UMMR - 4X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UMMR - 3X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UMMR - 4X24W H.F.	595x595	600x600	575x575
T55/UMMR - 3X24W H.F.	595x595	600x600	575x575
T55/UMMR - 4X14W H.F.	595x595	600x600	575x575
T55/UMMR - 3X14W H.F.	595x595	600x600	575x575
T55/UMMR - 2X28W H.F.	1.195x295	1.200x300	1.175x275

T55/UMBR 4x14 W.

