


# Recessed Low Luminance Luminaires for T-5 Lamp



**LUMINAIRE HOUSING:** Made in white, stoved steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm UNE-36.086-91 (EN-10130). Minted, punched and folded before the painting treatment.


**PAINTING:** In white epoxi-polyester, in robotic cabin with dust polymerization in continuous ovens at 180°, previous to degreasing and microcrystalline phosphatizing. Stable to the ultraviolet radiations and yellowing process.

**ACCESSORIES:** Brackets for plaster ceilings, under request.

## T55/UL

**OPTIC:** Parabolic high bright louvre, cat II, with perimetral finish decorative frame for embellishment. Anodized and polished aluminium glare free. High bright louvre as well as the flat plates with semi-bright flat cross blades (transversals).

	Dimensions	Ceiling Module	Hole Ceiling
T55/UL - 4X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UL - 3X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UL - 4X24W H.F.	595x595	600x600	575x575
T55/UL - 3X24W H.F.	595x595	600x600	575x575
T55/UL - 4X14W H.F.	595x595	600x600	575x575
T55/UL - 3X14W H.F.	595x595	600x600	575x575
T55/UL - 2X28W H.F.	1.195x295	1.200x300	1.175x275

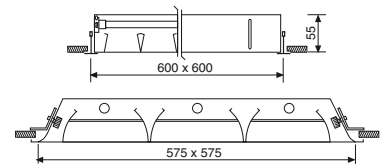

## T55/ULM

**OPTIC:** Parabolic mat-satinated louvre, cat II, with perimetral finish decorative frame for embellishment. Anodized and polished aluminium glare free. Mat-satinated louvre as well as the flat plates. Flat cross blades (transversals) are in semi-mat material.



	Dimensions	Ceiling Module	Hole Ceiling
T55/ULM - 4X28W H.F.	1.195x595	1.200x600	1.175x575
T55/ULM - 3X28W H.F.	1.195x595	1.200x600	1.175x575
T55/ULM - 4X24W H.F.	595x595	600x600	575x575
T55/ULM - 3X24W H.F.	595x595	600x600	575x575
T55/ULM - 4X14W H.F.	595x595	600x600	575x575
T55/ULM - 3X14W H.F.	595x595	600x600	575x575
T55/ULM - 2X28W H.F.	1.195x295	1.200x300	1.175x275

T55/UL 3x14 W.

