

T55



Recessed Low Luminance Luminaires for T-5 Lamp



LUMINAIRE HOUSING: Made in white, stoved steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm ENEC-10/VDE. Minted, punched and folded before the painting treatment.

PAINTING: In white epoxi-polyester, in robotic cabin with dust polymerization in continuous ovens at 180°, previous to degreasing and microcrystalline phosphatizing. Stable to the ultraviolet radiations and yellowing process. T-8 chassis with T-5 accesories.


ACCESSORIES: Brackets for plaster ceilings, under request.

T55/PRISMA

OPTIC: Made of pure methacrylate (PMMA) prismatic plate. Mounted in a steel frame coated with powder, thermo-hardered in UV stablished and remains "CRYSTAL CLEAR" during its service life. Four metal springs are included for hanging the frame-prismatic plate for easy tubes replacement and maintenance.



	Dimensions	Ceiling Module	Hole Ceiling
T55/PRISMA - 4X28W H.F.	1.195x595	1.200x600	1.175x575
T55/PRISMA - 3X28W H.F.	1.195x595	1.200x600	1.175x575
T55/PRISMA - 4X24W H.F.	595x595	600x600	575x575
T55/PRISMA - 3X24W H.F.	595x595	600x600	575x575
T55/PRISMA - 4X14W H.F.	595x595	600x600	575x575
T55/PRISMA - 3X14W H.F.	595x595	600x600	575x575
T55/PRISMA - 2X28W H.F.	1.195x295	1.200x300	1.175x275

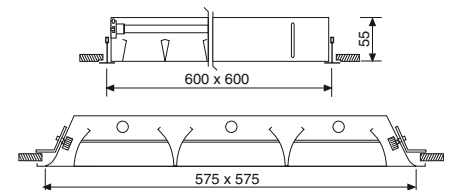

T55/UB



OPTIC: Parabolic high bright louvre, cat II, with perimetral finish decorative frame for embellishment. Anodized and polished aluminium, glare free. Cross blades (transversals) in semi-mat, flat plates in white.



	Dimensions	Ceiling Module	Hole Ceiling
T55/UB - 4X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UB - 3X28W H.F.	1.195x595	1.200x600	1.175x575
T55/UB - 4X24W H.F.	595x595	600x600	575x575
T55/UB - 3X24W H.F.	595x595	600x600	575x575
T55/UB - 4X14W H.F.	595x595	600x600	575x575
T55/UB - 3X14W H.F.	595x595	600x600	575x575
T55/UB - 2X28W H.F.	1.195x295	1.200x300	1.175x275

T55/UB 4x14 W.

