


Indirect Luminaires for Compact Lamps for recessed application Low Luminance




LUMINAIRE HOUSING AND PAINTING: Same as LD.

OPTIC: A combination of two satin white painted curved reflectors for indirect light projection and a double parabolic specular aluminium reflector for direct light projection. Two curved perforated metal shades are placed in either sides of the parabolic reflector to project an homogenous light distribution.

ACCESORIES: Brackets for mounting on plasterboard ceilings and special frame.



LD/BR 2x55+1x18 W.

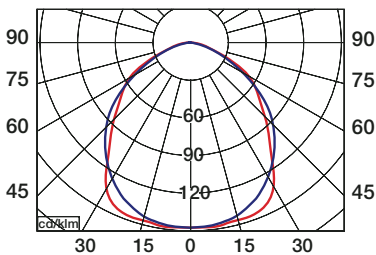

LD/BR 236 - 2 x 36 + 1 x 18W.
LD/BR 255 - 2 x 55 + 1 x 18W.

Dimensions	Ceiling Module	Hole Ceiling
595x595	600x600	575x575

