

Polycarbonate Diffuser (unbreakable)



LUMINAIRE HOUSING: Extra slim size T-5 Mould with very modern design with Out-put. Made of Injected moulded Polycarbonate (PC), stable, protected to UV radiations with high stability and mechanical resistance. Finished in grey colour with efficient polyurethane gasket which is injected into the body to achieve protection IP65.

Body can be fixed directly to the ceiling by screws supplied on luminaire or with steel bracket system also included.

According to norms EN-60598.


REFLECTOR: Made of galvanized steel sheet and lacquered in white epoxy-poliester by thermohardening polyurethane powders, stabilized and UV protected, proceeded by was-

hing and phospo-cleaning of the surfaces. Hanging system for reflector is included on the luminaire.


DIFFUSER: Injection moulded Polycarbonate (PC), clear prismatic with internal longitudinal stripes. UV protected.

The diffuser is fixed to the body through Inox steel clips supplied with the luminaire.

T5/RPC 2x54 W.



POWER	1x28 W	1x35 W
	2x28 W	2x35 W
N° clips	10	12

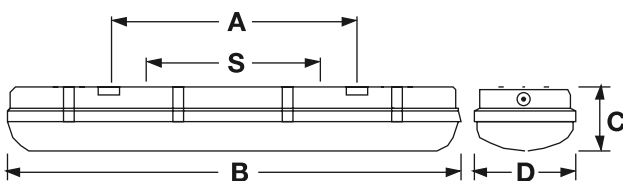

WARNINGS: This luminaire must not be installed on surfaces subject to high vibrations. It has relative resistance to polluted environments with chemical agents and oil. For any question please consult with LUX-MAY-Manufacturas Plásticas May, S.A.

	W.	Anchorage Surface A	Anchorage Suspension S	B	C	D
T5/RPC-128	1 x 28 W.	680	860	1.210	74	60
T5/RPC-135	1 x 35 W.	980	1.160	1.520	74	60
T5/RPC-149	1 x 49 W.	980	1.160	1.520	74	60
T5/RPC-154	1 x 54 W.	680	860	1.210	74	60
T5/RPC-180	1 x 80 W.	980	1.160	1.520	74	100
T5/RPC-228	2 x 28 W.	680	860	1.210	74	100
T5/RPC-235	2 x 35 W.	980	1.160	1.520	74	100
T5/RPC-249	2 x 49 W.	980	1.160	1.520	74	100
T5/RPC-254	2 x 54 W.	680	860	1.210	74	100
T5/RPC-280	2 x 80 W.	980	1.160	1.520	74	100