


T-5 Suspended Low Luminance Luminaires



Suspended luminaire with Indirect-Direct light distribution. Recommended for spaces where a medium luminous intensity is needed, VDT, workspaces halls, etc.

LUMINAIRE HOUSING: Made of steel sheet with high torsion resistance and a minimum guaranteed thickness of 0,6 mm according to Norm ENEC-10/VDE.
PAINTING: Surface treatment powder coating, painted in white, stabilized and U.V. protected.

OPTIC: Double parabolic diffusers, dark-light, cat II. Anodized, polished, glare free. Direct light distribution.
SUSPENSION SYSTEM: In 1250 mm. cable length.
FOR CONTINUOUS LINES: See page 11.

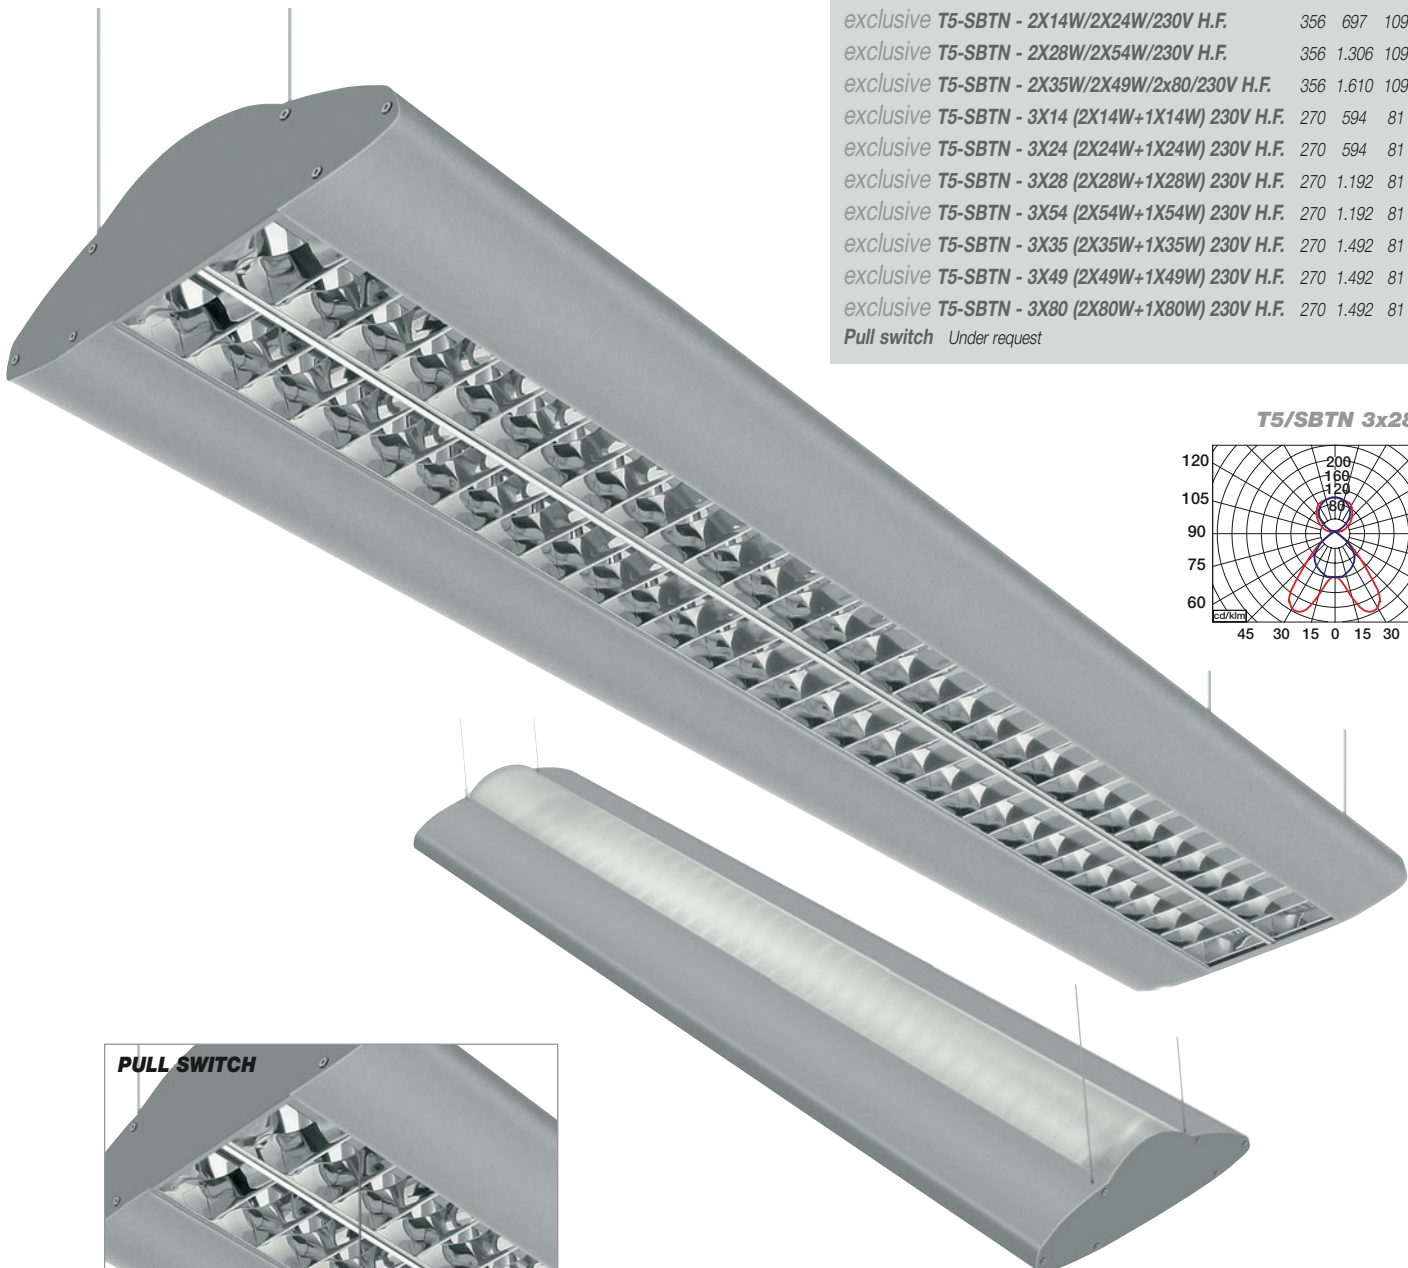

	A1	L1	H1	X	Y
exclusive T5-SBTN - 2X14W/2X24W/230V H.F.	356	697	109	255	677
exclusive T5-SBTN - 2X28W/2X54W/230V H.F.	356	1.306	109	255	1.286
exclusive T5-SBTN - 2X35W/2X49W/2x80/230V H.F.	356	1.610	109	255	1.590
exclusive T5-SBTN - 3X14 (2X14W+1X14W) 230V H.F.	270	594	81	153	576
exclusive T5-SBTN - 3X24 (2X24W+1X24W) 230V H.F.	270	594	81	153	1.576
exclusive T5-SBTN - 3X28 (2X28W+1X28W) 230V H.F.	270	1.192	81	153	1.174
exclusive T5-SBTN - 3X54 (2X54W+1X54W) 230V H.F.	270	1.192	81	153	1.174
exclusive T5-SBTN - 3X35 (2X35W+1X35W) 230V H.F.	270	1.492	81	153	1.474
exclusive T5-SBTN - 3X49 (2X49W+1X49W) 230V H.F.	270	1.492	81	153	1.474
exclusive T5-SBTN - 3X80 (2X80W+1X80W) 230V H.F.	270	1.492	81	153	1.474
Pull switch Under request					

