





LUX/M 2000



- Die-cast aluminium casing with cooling fins. Heat zinc-coating steel plate supporting bracket.
- Anode-oxidized aluminium goniometric device.
- Stainless steel external screws.
- Epoxy powder coating in black colour.
- Reflector is oxidized and polished made in extra-pure aluminium. 99.85% Faceted surface-large beam.
- Symmetrical beam.
- Tempered glass heat resistant shock-proof with stainless-steel securing clips and external screws.
- Electrical casing in die-cast black aluminium IP65.

LUX/M 2000W. HIT
LUX/M 2000W. HIT with lamp

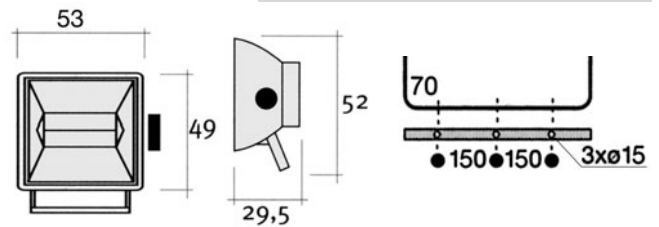


LUX/M 1000




- Die-cast aluminium casing with cooling fins. Heat zinc-coating steel plate supporting bracket.
- Anode-oxidized aluminium goniometric device.
- Stainless steel external screws.
- Epoxy powder coating in black colour.
- Reflector is oxidized and polished made in extra-pure aluminium. 99.85% Faceted surface-large beam.
- Symmetrical beam.
- Tempered glass heat resistant shock-proof with stainless-steel securing clips and external screws.
- Electrical casing in die-cast black aluminium IP65.

LUX/M 1000W. HIT
LUX/M 1000W. HIT with lamp
LUX/M 1000W. HPS
LUX/M 1000W. HPS with lamp

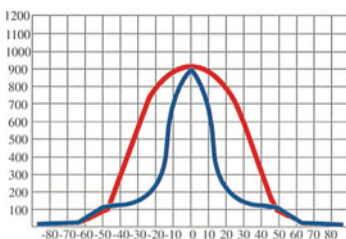

LUX/M 1000 W. HIT

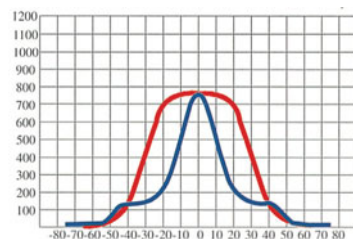

LUX/M 1000 W. HPS

