





CIRCULAR SURFACE IP65 T5 • FC / H.F. / LED


SURFACE IP65 T5
LUNA-350
LUNA-430




Mounting	Surface application to ceiling or column.	
Lamps	T5 FC circular , LED CRI>80	
Optical system	Reflector.	
Light distribution	Symmetrical.	
Wiring	LUNA: Electronic ballast EEI=A2. PF>0,95. LUNA LED: Electronic control gear EEI=A++. PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI), presence sensor and light prepresence and/or emergency Kit (1 hour).	
Material	Body: Polycarbonate in white colour. Cover: Polycarbonate. Diffuser: Self-extinguishing opal polycarbonate UV stabilized.	
Surface finish	White.	
Accessories	Accessories Under request, presence detector integrated into the luminaire.	



LUNA-350 IP65 / LUNA LED-350 IP65

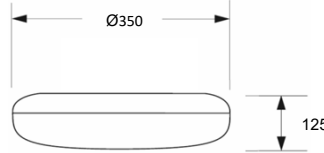

LUNA-430 IP65 / LUNA LED-430 IP65

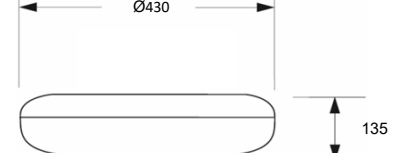

CODE	REFERENCE	Kg.	Power W	Lamp	Lampholder	Colour temperature CCT (K)	DIMM DALI	Emergency MC-1	Presence detector
1602703022L	LUNA-350 IP65 22W H.F.+LAMP.	(1,4)	22	T5 FC circular	2GX13	4000	✓	✓	✓
1602713040L	LUNA-430 IP65 40W H.F.+LAMP.	(2,1)	40	T5 FC circular	2GX13	4000	✓	✓	✓
1602713055L	LUNA-430 IP65 55W H.F.+LAMP.	(2,1)	55	T5 FC circular	2GX13	4000	✓	✓	✓
1602713402L	LUNA-430 IP65 40W+22W H.F.+LAMP.	(2,2)	40+22	T5 FC circular	2GX13	4000	✓	✓	✓
1602713552L	LUNA-430 IP65 55+22W H.F.+LAMP.	(2,2)	55+22	T5 FC circular	2GX13	4000	✓	✓	✓
160270L150	LED LUNA LED-350 IP65 16W. 2000lm/840	(1,5)	14	LED module 175 lm/W	-	4000	✓	✓	✓
160270L361	LED LUNA LED-430 IP65 25W. 4700lm/840	(1,5)	30	LED module 188 lm/W	-	4000	✓	✓	✓

Under request, other power and colour temperature.