



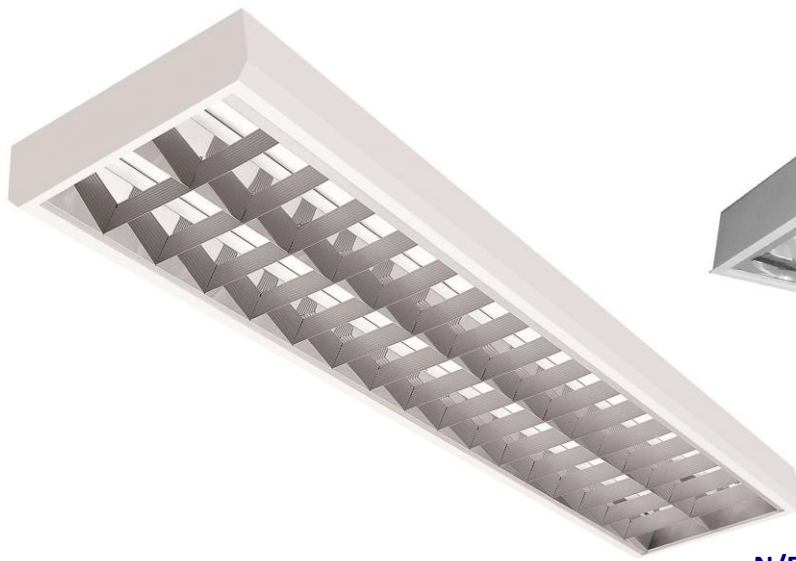

SURFACE T8 • HPF / H.F.

SURFACE
N/EXT
MN/EXTL

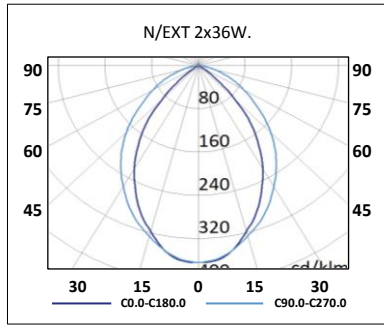

N/EXT



MN/EXTL

Mounting	Surface.
Lamps	T8
Optical system	Aluminum diffuser.
Light distribution	Direct.
Wiring	HPF: Magnetic ballast + starter + power factor correction capacitor. PF>0,95 H.F.: Electronic ballast EEI=A2. PF>0,95
Material	Body: 0.6 mm thick steel sheet, lacquered in white with anti-corrosive treatment according to ENEC-10 and VDE standards. Diffuser: Bright parabolic aluminum with stepped crossings.
Surface finish	Body: White colour RAL 9003.

<p>Mounting</p>	<p>N/EXT 2x36 W. H.F.</p>	<p>N/EXT 2x58 W. H.F.</p>	<p>MN/EXTL 4x18 W. HPF</p>



CODE	REFERENCE	Kg.	Power	Lamp	Lampholder	DIMM		Emergency	
						1-10V	DALI	MC-1	MC-3
1512813236	N/EXT-2x36W. H.F.	(4,1)	72	T8	G13	✓	✓	✓	✓
1512813258	N/EXT-2x58W. H.F.	(5,0)	116	T8	G13	✓	✓	✓	✓
15128124183	MN/EXTL-4x18W. 230V. HPF	(4,3)	72	T8	G13	-	-	✓	✓