





ASYMMETRIC DOWNLIGHTS • =LED

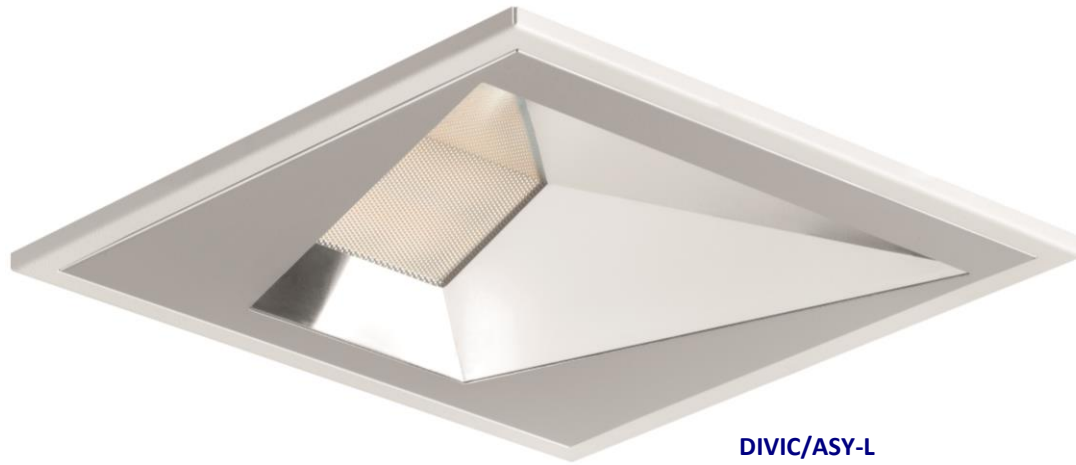


RECESSED DOWNLIGHT LED DIVIC/ASY-L ASYMMETRIC

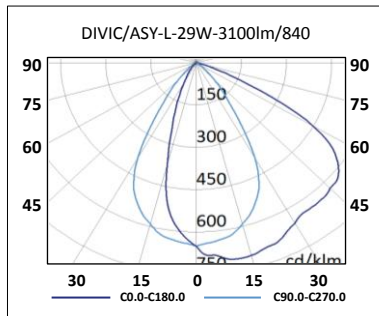

DIVIC/ASY-L

Mounting	Recessed.	
Light source	LED compact modules COB . Colour temperature 4000K, standard. (Option 3000K).	
Optical system	Polished asymmetric reflector. Under request, matt reflector.	
Light distribution	Direct.	
Wiring	Electronic control gear (EEI=A+). PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI). Under request, emergency Kit (1 or 3 hours).	
Material	Body and trim: Steel sheet. Diffuser: Microprismatic PMMA.	Reflector: Polished anodized aluminum. Cover: Transparent PMMA.
Surface finish	Frame: White RAL 9003. Under request, transparent cover IP44.	
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous throughout the projection area. Low power consumption and high efficiency. Average service life >50.000 hours. Maintenance-optimised design. Careful with the environment, does not contain mercury.	

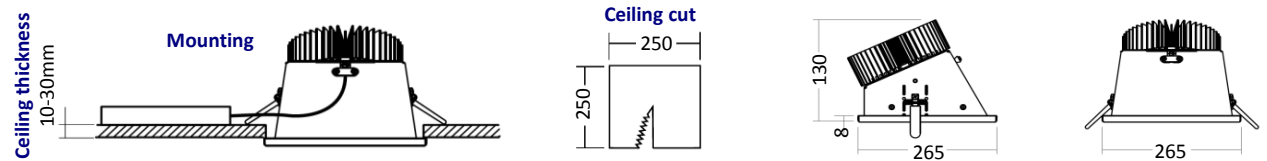

AVAILABLE

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Colour temperature CCT (K)	Colour rendering index CRI (Ra)	DIMM DALI
DSQA30L310	DIVIC/ASY-L-29W-3100lm/840	(1,5)	3100	29	107	4000	>80	✓
DSQA30L355	DIVIC/ASY-L-33W-3550lm/840	(1,5)	3550	33	108	4000	>80	✓

Available colour temperature 3000K.