




SURFACE - SUSPENDED • LED



SURFACE - SUSPENDED LED NV/MR-LED






NV/MR-LED



| | |
|---------------------------|---|
| Mounting | Surface / Suspended. |
| Light source | LED |
| Optical system | Diffuser. Matt anodized aluminum + Miro 5 PMMA plate. |
| Light distribution | Direct. |
| Wiring | Electronic control gear (EEI=A+). PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI). Under request, emergency Kit (1 or 3 hours). |
| Material | Body: Cold rolled white steel, high torsion resistance and guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Matt anodized aluminum (Miro 5) + PMMA plate. |
| Surface finish | White colour RAL 9003. |
| Benefits | LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. No maintenance required. Careful with the environment, it does not contain mercury. |


6100 lm 149 lm/W >80 Ra

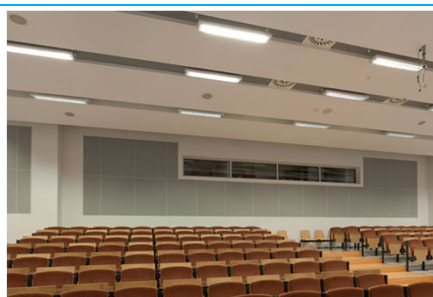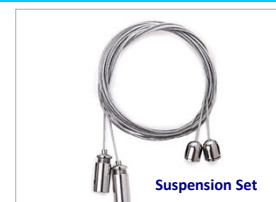

**NV/MR-LED-31W-4600lm/840
(290x600)**



**NV/MR-LED-41W-6100lm/840
(210x1200)**

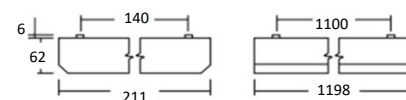

220-240V 50-60Hz LED ECG EEI=A+ F IP20 UGR<19

AVAILABLE

ECG 1-1W ECG DALI

| CODE | REFERENCE | Kg. | Light output | Power | Efficiency LED + Driver | DIMM DALI | Emergency | |
|------------|-------------------------------------|-------|--------------|-------|-------------------------|-----------|-----------|-------|
| | | | | | | | MC -1 | MC -3 |
| 151220L000 | NV/MR-LED-31w-4600lm/840 (290x600) | (2,7) | 4600 | 31 | 148 | ✓ | ✓ | ✓ |
| 151210L052 | NV/MR-LED-41w-6100lm/840 (210x1200) | (3,8) | 6100 | 41 | 149 | ✓ | ✓ | ✓ |
| 15620001 | ACC. SUSPENSION SET 4 UNITS | - | - | - | - | - | - | - |