




# RECESSED LOW PROFILED • LED EXCELLENT COMFORT





RECESSED LED  
T5-PTE/MR

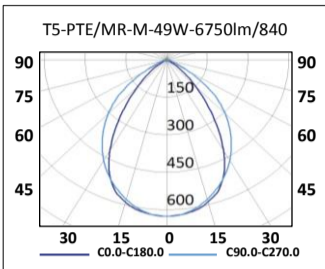

T5-PTE/MR

<b>Mounting</b>	Recessed. Plaster ceilings, plasterboard.
<b>Light source</b>	LED
<b>Optical system</b>	Miro 5 matt parabolic louvre and Miro 5 diffuser (Matt aluminum and PMMA).
<b>Light distribution</b>	Direct.
<b>Wiring</b>	Electronic control gear (EEI=A++). PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI). Under request, emergency Kit (1 or 3 hours).
<b>Material</b>	Body: Low profiled, enameled steel in white colour RAL 9003. Fixing anchors (4 units) for smooth ceilings. Louvre: Miro 5 matt parabolic. Diffuser: PMMA diffuser. Fixing by pressure springs.
<b>Surface finish</b>	White colour RAL 9003.
<b>Benefits</b>	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. No maintenance required. Careful with the environment, it does not contain mercury.

7850 Im 151 lm/W >80 Ra

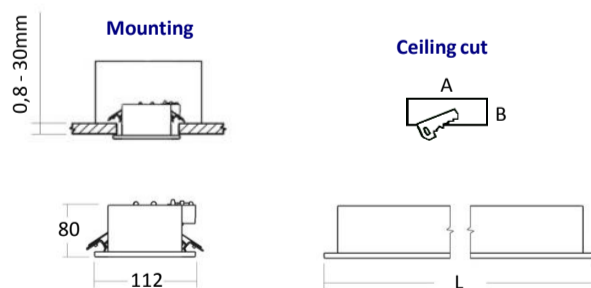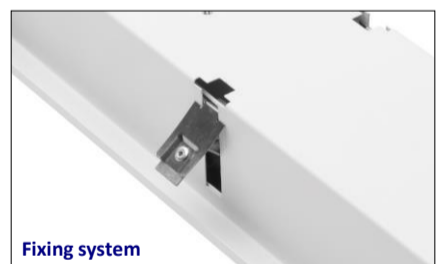

	L	Ceiling cut	
		A	B
T5-PTE/MR-M-21W	1200	1180	100
T5-PTE/MR-M-49W	1200	1180	100
T5-PTE/MR-L-42W	1500	1480	100
T5-PTE/MR-L-56W	1500	1480	100



CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED + Driver lm/W	Colour temperature CCT (K)	Colour rendering index CRI (Ra)	DIMM DALI	Emergency MC-1	Emergency MC-3
137210L0270	LED T5-PTE/MR-M-21W-2700lm/840	(2,3)	2700	21	129	4000	>80	✓	✓	✓
137210L0675	LED T5-PTE/MR-M-49W-6750lm/840	(2,3)	6750	49	138	4000	>80	✓	✓	✓
137220L0600	LED T5-PTE/MR-L-42W-6000lm/840	(2,8)	6000	42	143	4000	>80	✓	✓	✓
137220L0785	LED T5-PTE/MR-L-56W-7850lm/840	(2,8)	7850	52	151	4000	>80	✓	✓	✓