




IP 65 WATERPROOF FITTINGS 12-24V • LED



WATERPROOF FITTINGS 12-24V LED
EST/PRISMAPC

PRISMATIC DIFFUSER



EST/PRISMAPC

- NO CLIPS DIFFUSER
- VERY REDUCED HEIGHT
- QUICK CONNECTION

Mounting	Surface.	
Light source	LED modules SMD ELT.	
Optical system	Diffuser resistant to UVA rays (no clips system), reflector. Colour temperature 4000K, standard. (Option 3000K, 6000K).	 Flexible LED strip
Light distribution	Direct.	
Wiring	Electronic control gear (EEI=A+) ELT. PF>0,95 Possibility of incorporating a presence detector.	 Presence detector
Material	Body: Polycarbonate. Reflector: Aluminum. Diffuser: Unbreakable longitudinal prismatic polycarbonate. Ceiling fixing: Stainless steel clamp	
Surface finish	Body: Grey color with efficient gasket wich is injected into the body.	 Suspension Kit, under request
Accessories	Suspension set 2 units. IP-68 fast connector (not included).	
Benefits	Ultra compact waterproof fitting. Optimal lighting curve, homogeneous lighting in all area of projection. Low power consumption and high efficiency. Average service life > 50.000 hours. Maintenance-optimised design. Careful with the environment, it does not contain mercury. Fast electrical connection without opening the luminaire.	

4700 lm 100 lm/W >80 Ra

NO CLIPS DIFFUSER



LED MODULES



ALLOWS TO ALING THE LUMINAIRES ONCE INSTALLED



IP65 WATERPROOF FITTINGS 12-24V • LED PRISMATIC DIFFUSER




WATERPROOF FITTING LED
EST/PRISMAPC

IP-68 FAST CONNECTOR | UNDER REQUEST

IP-68 FAST CONNECTOR
04010201 FAST CONNECTOR EST/ONIX



FAST ELECTRICAL CONNECTION

CONNECTION OF FEW LUMINAIRES BETWEEN EACH OTHER
1563610L002 INC.ELEC LC EST/ONIX

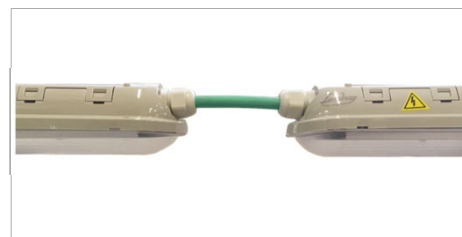

Fast electrical connection without opening the luminaire.

Easy connection of few luminaires between each other.

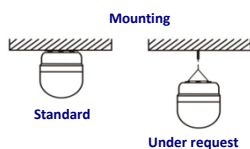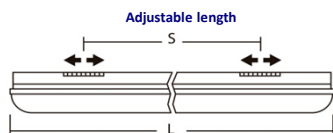

	X	Y	L	S
EST/PRISMAPC/SLC-590	72	61	590	250-280
EST/PRISMAPC/SLC-1180	72	61	1180	570-670
EST/PRISMAPC/SLC-1480	72	61	1480	850-950



CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Colour temperature and rendering index		Replace to lamp
						CCT (K)	CRI (Ra)	
EPN231K8G	EST/PRISMAPC-590-LED-18W-12V-1800lm/840	(0,8)	1800	18	100	4000	>80	2x18W.
EPN241K8G	EST/PRISMAPC-590-LED-18W-24V-1800lm/840	(0,8)	1800	18	100	4000	>80	2x18W.
EPN333K6G	EST/PRISMAPC-1180-LED-36W-12V-3600lm/840	(1,4)	3600	36	100	4000	>80	2x36W.
EPN343K6G	EST/PRISMAPC-1180-LED-36W-24V-3600lm/840	(1,4)	3600	36	100	4000	>80	2x36W.
EPN434K7G	EST/PRISMAPC-1480-LED-47W-12V-4700lm/840	(1,8)	4700	47	100	4000	>80	2x58W.
EPN444K7G	EST/PRISMAPC-1480-LED-47W-24V-4700lm/840	(1,8)	4700	47	100	4000	>80	2x58W.
1563610L002	INC.ELEC LC EST/ONIX							
04010201	FAST CONNECTOR EST/ONIX							

More powers under request.

Option colour temperature 3000K, 6000K.