




HIGH POWER PROJECTORS IP66 • LED



24V DC

HIGH POWER LED PROJECTOR IP66 MEGATRON/N



MEGATRON/N/400W-71000lm




MEGATRON/N/800W-142000lm

OPTICAL OF 20°, 40°

Replacement of 1000W/2000W HIT

Until 142.000lm

Mounting	Surface.
Light source	LED PMMA PHILIPS®/CREE® (available 5000K). Under request: 3000k, 4000K and 6000K.
Optical system	Lens PMMA PLEXIGLAS® of great light transmissibility. Optical of 20°, 40°.
Light distribution	Direct.
Wiring	Input 24V DC. Direct.
Material	Lens: PMMA PLEXIGLAS® - without yellows, with a high degree of light transmission with a useful life of 30 years. Heatsink: Extruded anodized aluminum protected against UV rays. Clips: Silicone.
Surface finish	Black colour RAL 9005.
Benefits	Industrial projector of long life (50.000 hours) and very high efficiency. 3in1 system (light source, cooling and lens). High versatility system. Availability of different light distribution. Watertightness IP66, with IK09 protection. For connect to a panel solar or batteries.



142000 lm

177 lm/W

>80 Ra

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.





HIGH POWER PROJECTORS IP66 • LED

24V DC




PHOTOMETRIC POLAR DIAGRAMS MEGATRON/N



HIGH POWER LED PROJECTOR IP66 MEGATRON/N





EASY TO TURN

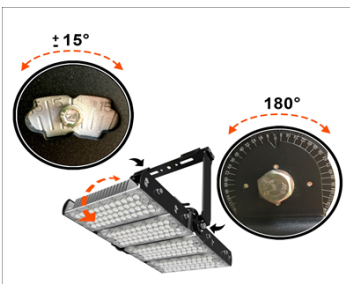

SIMPLE INSTALLATION



HEAT SINK

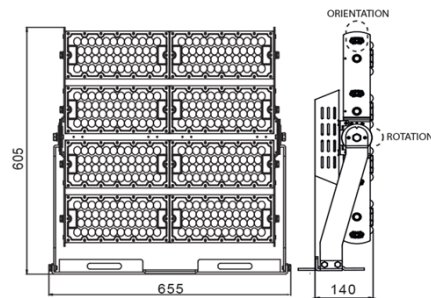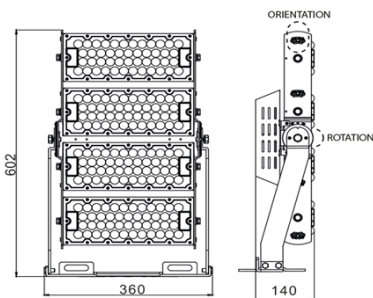

AVAILABLE 3000K 4000K 6000K

CODE	REFERENCE	Kg.	Power W	light output lm	Beam angle	Connection Solar Panels	Batteries	Replacement of HIT
MT0102L0800	LED MEGATRON/N/20°-L-IP66-24V-400W 71000lm/850	(10,5)	400	71000	20°	YES	YES	1000W
MT0112L0800	LED MEGATRON/N/40°-L-IP66-24V-400W 71000lm/850	(10,5)	400	71000	40°	YES	YES	1000W
MT0102L1705	LED MEGATRON/N/20°-XL-IP66-24V-800W-142000lm/850	(18,8)	800	142000	20°	YES	YES	2000W
MT0112L1705	LED MEGATRON/N/40°-XL-IP66-24V-800W 142000lm/850	(18,8)	800	142000	40°	YES	YES	2000W