

N/OPALPC IP65

ES

Montaje: Adosable.

Fuente de luz: Módulos lineales LED SMD TRIDONIC.

Temperatura de color 4000K.

Disponibles, 3000K, 5000K, 6000K.

Sistema óptico: Difusor opal.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico TRIDONIC. PF>0,95.

Disponibles, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Acero galvanizado lacado en blanco con tratamiento anti-corrosivo según normas ENEC-10 y VDE. Difusor: Opal.

Acabado: Color blanco RAL 9003.



EN

Mounting: Surface.

Light source: LED linear modules SMD TRIDONIC.

Temperature color 4000K.

Available, 3000K, 5000K, 6000K.

Optical system: Opal diffuser.

Light distribution: Direct.

Electrical equipment: TRIDONIC electronic control gear. PF> 0,95.


Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h).

Materials: Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Opal.

Surface finish: White color RAL 9003.



N/OPALPC-IP65-55W

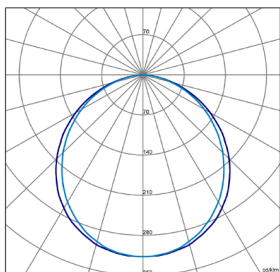


IP65



SALAS BLANCAS
CLEAN ROOM



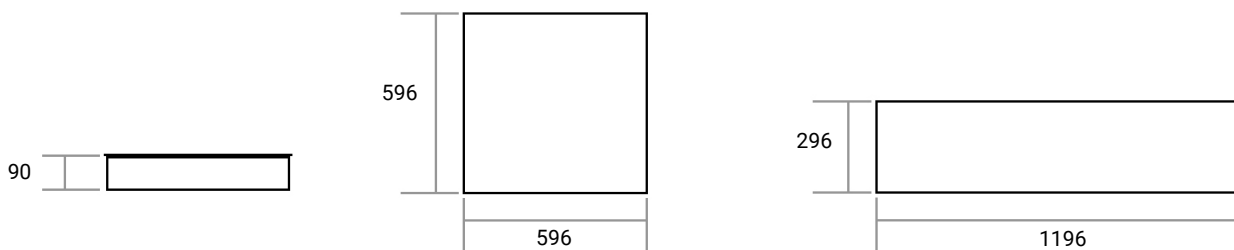

ESTANDAR/STANDARD

- 5 AÑOS
5 YEARS
- 220-240V
50-60Hz
- IP 65
- IK 02
- CLASE I
CLASS I
- 50.000h
L80B10
- 20°
+40°
- CRI 80

DISPONIBLE/AVAILABLE

- 1-10V
DALI
- 3000K
5000K
6000K
- EMERGENCY
1h
3h

CONFIGURACION ONLINE
ONLINE CONFIGURATION



| Código Code | Referencia Reference | Kg Kg | Potencia Power | Lúmenes Lumens | Eficiencia Efficiency | CCT (K) CCT (K) |
|----------------|---|----------|-------------------|-------------------|--------------------------|--------------------|
| NO6224K9B | N/OPALPC-IP65-32W 4900lm/840 (596x596) | 7,2 | 32W | 4900 | 153 lm/W | 4000 |
| NO6314K9B | N/OPALPC-IP65-42W 5800lm/840 (596x596) | 7,2 | 42W | 5800 | 138 lm/W | 4000 |
| NO6225K8B | N/OPALPC-IP65-55W 7600lm/840 (596x596) | 7,2 | 55W | 7600 | 138 lm/W | 4000 |
| NO6315K8B | N/OPALPC-IP65-32W 4900lm/840 (1196x296) | 7,2 | 32W | 4900 | 153 lm/W | 4000 |
| NO6227K6B | N/OPALPC-IP65-42W 5800lm/840 (1196x296) | 7,2 | 42W | 5800 | 138 lm/W | 4000 |
| NO6317K6B | N/OPALPC-IP65-55W 7600lm/840 (1196x296) | 7,2 | 55W | 7600 | 138 lm/W | 4000 |

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K, 5000K, 6000K SET DE SUSPENSION/SUSPENSION SET
 DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP) REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP)