




STAINLESS STEEL METALIC **LED**

WATERPROOF FITTINGS



IP65 12-24V



STEEL WATERPROOF FITTINGS IP65 LED
ACERO LED 12-24 V

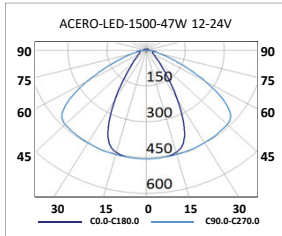

| | |
|---------------------------|---|
| Mounting | Surface. |
| Light source | LED |
| Optical system | Lacquered in white reflector. AL/Bright aluminium. |
| Light distribution | Direct and possibility optic 60° or 90°. |
| Wiring | Electronic control gear (EEI=A++). PF>0,95 |
| Material | Body: Stainless steel 18/8 (0,7mm). Diffuser: Tempered glass. Under request, unbreakable polycarbonate cover. Reflector: Sheet steel lacquered in white. AL/Bright aluminium. |
| Surface finish | Silver colour. |

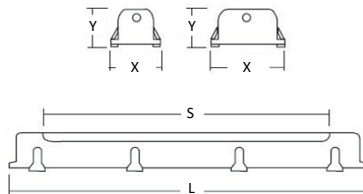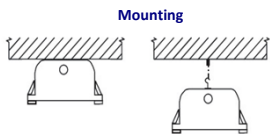

| | X | Y | L | S |
|---------------------|-----|----|------|------|
| ACERO 1X600 | 135 | 90 | 705 | 500 |
| ACERO 1X1200 | 135 | 90 | 1305 | 1100 |
| ACERO 1X1500 | 135 | 90 | 1605 | 1400 |
| ACERO 2X600 | 195 | 90 | 705 | 500 |
| ACERO 2X1200 | 195 | 90 | 1305 | 1100 |
| ACERO 2X1500 | 195 | 90 | 1605 | 1400 |



| CODE | REFERENCE | Kg. | Power | Lamp | Lampholder | Replace to lamp |
|-----------|------------------------------------|-------|-------|------|------------|-----------------|
| ACR121K8D | ACERO-LED-590-18W 12V. 1800lm/840 | (3,8) | 18 | LED | - | 2x18W. |
| ACR123K6D | ACERO-LED-1200-36W 12V. 3600lm/840 | (5,2) | 36 | LED | - | 2X36W. |
| ACR124K7D | ACERO-LED-1500-47W 12V. 4700lm/840 | (6,2) | 47 | LED | - | >2X36W. |
| ACR241K8D | ACERO-LED-590-18W 24V. 1800lm/840 | (3,8) | 18 | LED | - | 2x18W. |
| ACR243K6D | ACERO-LED-1200-36W 24V. 3600lm/840 | (5,2) | 36 | LED | - | 2x36W. |
| ACR244K7D | ACERO-LED-1500-47W 24V. 4700lm/840 | (6,2) | 47 | LED | - | >2x36W. |

Steel hook and steel fixing clips included.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.