

# Lux-May


RECESSED • LED



NEW GENERATION

Flicker free


**RECESSED LED  
BARLIGHT**

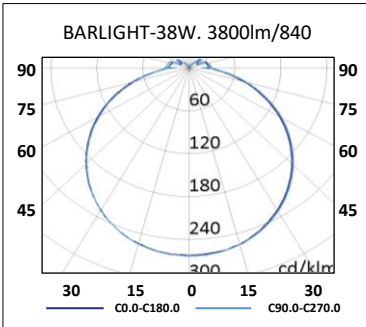

Perimeter lighting.  
Backlighting of the roof.



BARLIGHT

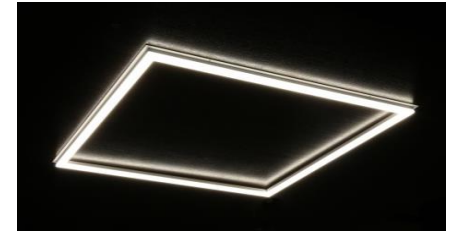


<b>Mounting</b>	Recessed/Surface/Suspended. Armstrong ceilings, plaster, plasterboard.
<b>Light source</b>	Linear LED modules SMD
<b>Optical system</b>	Opal diffuser. Colour temperature 4000K.
<b>Light distribution</b>	Direct.
<b>Wiring</b>	Electronic control gear (EEI=A+). PF>0,95 Possibility of incorporating dimmable electronic control gear (1-10V - DALI) and/or emergency Kit (1 or 3 hours).. Optional, flicker free.
<b>Material</b>	Body: Extruded aluminum lacquered in white of professional design. Diffuser: Opal thermoplastic material easy to clean.
<b>Accessories</b>	Suspension Set.
<b>Benefits</b>	LED luminaire with integrated electronic control gear. Technological guarantee. Colour rendering index Ra>80. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average life service >50.000 hours. No maintenance required. Careful with the environment, it does not contain mercury.



4500 lm  
100 lm/W  
>80 Ra




Mounting  
RECESSED

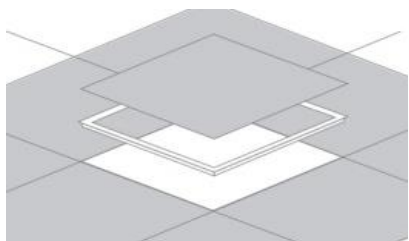

Mounting  
SURFACE



Mounting  
SUSPENDED

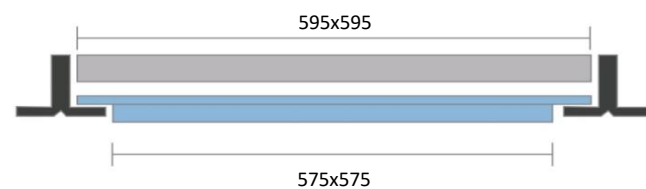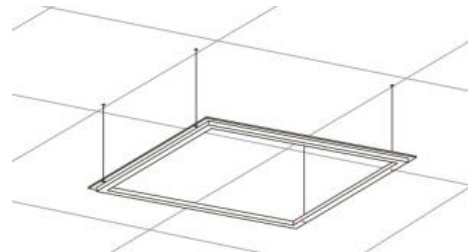

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED + Driver lm/W	Colour temperature CCT (K)	Flicker free	DIMM		Emergency	
								1-10V	DALI	MC-1	MC-3
LES02L320	BARLIGHT-32W. 3200lm/840 TR	(3,2)	3200	32	100	4000	-	✓	✓	✓	✓
LES01L380	BARLIGHT-38W. 3800lm/840 LM	(3,2)	3800	38	100	4000	-	✓	✓	✓	✓
LES02L380	BARLIGHT-38W. 3800lm/840 PH/TR	(3,2)	3800	38	100	4000	✓	✓	✓	✓	✓
LES03L380	BARLIGHT-45W. 4500lm/840 TR	(3,2)	4500	45	100	4000	yes	✓	✓	✓	✓
15620001	ACC. SUSPENSION SET (4 UNITS)	-	-	-	-	-	-	-	-	-	-
LEK10L002	ACC. INCREASE FLICKER FREE	-	-	-	-	-	-	-	-	-	-