




SURFACE DOWNLIGHT LED BLOCK-90



BLOCK-90 RAL 9003






BLOCK-90 RAL 9005



BLOCK-90 RAL 9006

Mounting	Surface.	
Light source	LED compact modules COB TRIDONIC. Temperature color 4000K (standard). Optional 3000K.	
Optical system	Reflector.	
Light distribution	Direct. Optic 36° (standard). Optional 24°.	
Wiring	Electronic control gear (EEI=A+). PF>0,95 Under request, dimmable electronic control gear (DALI).	
Material	Body: Heat enameled steel. Reflector: Bright anodized aluminum. Cover: Transparent glass.	
Surface finish	White color RAL 9003 (standard). Optional grey RAL 9006, black RAL 9005.	
Benefits	LED luminaire with integrated electronic control gear. Technological Guarantee. Optimal lighting curve, homogeneous throughout the projection area. Low power consumption and high efficiency. Average service life > 50.000 hours. CRI 90. L80/B10. Careful with the environment, does not contain mercury.	

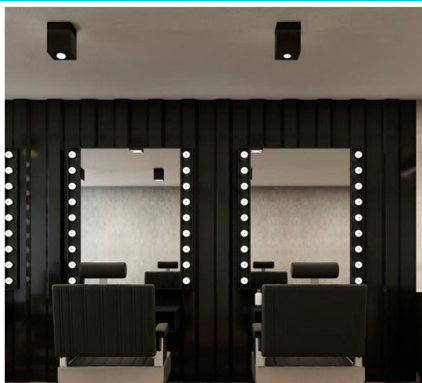

CODE	REFERENCE	Kg.	Light output	Power	Efficiency	Beam angle	Colour temperature	Colour rendering index	Cooling
			lm	W	lm/W		CCT (K)	CRI (Ra)	
BLK111K8B	BLOCK-90-36°-12W 1840lm/840	(0,8)	1840	12	153	36°	4000	>90	Pasiva
BLK111K8BY	BLOCK-90-24°-12W 1840lm/840	(0,8)	1840	12	153	24°	4000	>90	Pasiva