




RECESSED DOWNLIGHT • LED




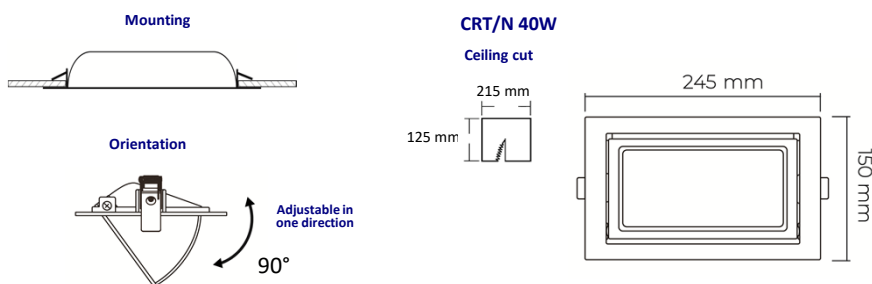
RECESSED DOWNLIGHT LED CRT/N




CRT/N

AVAILABLE IN
3000K, 4000K, 6000K

Mounting	Recessed.
Light source	Chip SMD  . Temperature color color 3000K, 4000K, 6000K.
Optical system	Microprismatic diffuser.
Light distribution	Optic 120°.
Wiring	Electronic control gear (EEI=A+). PF>0,95
Material	Body: Molded aluminum. Reflector: White aluminum. Diffuser: Microprismatic diffuser.
Surface finish	Molded aluminium White RAL 9003.
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average service life >30.000 hours. Colour rendering index CRI (Ra) >80. No maintenance required. Careful with the environment, it does not contain mercury.



CODE	REFERENCE	Weight	Light output	Power	Efficiency LED module + Driver	Angle beam	Emergency MC-1
CRT214K0B	 CRT/N-40W 4400lm/830-840-860	(1,4)	4400	40	110	120°	✓

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.