


Lux-May

RECESSED DOWNLIGHT
D-LED-IP65-25W-2300lm/840

DOWNLIGHTS IP65 • LED



FLICKER FREE
UGR<19
IP-65






D-LED-IP65-25W-2300lm/840

Mounting	Recessed.
Light source	LED SMD TRIDONIC.
Optical system	Optical 100°. Colour temperature 4000K, standard. Option 3000K, 6000K.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A+). PF>0,95 TRIDONIC. Electronic equipment: IP-20. Under request: IP-65. Possibility of incorporating dimmable electronic control gear (EEI=A1 1-10V or DALI) and/or emergency Kit (1 or 3 hours).
Material	Reflector: Polycarbonate. Heat sink: Aluminium.
Surface finish	Difusser: Opal. White (RAL 9003).
Benefits	Flicker free technology. LED luminaire with integrated electronic control gear. Average service life > 50.000 hours. Colour rendering index Ra>80. Passive cooling. No UVA or infrared radiation. No maintenance required. Easy installation.

2300 lm 92 lm/W >80 Ra



D-LED-IP65-25W-2300lm/840

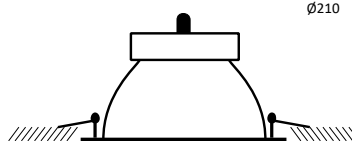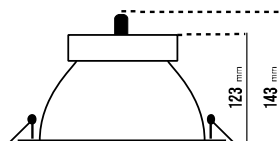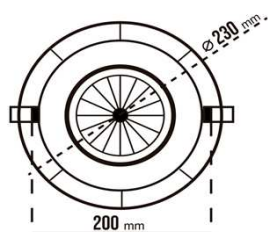

CUT
Ø210



CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED + Driver lm/W	Colour temperature	Beam angle	DIMM 1-10V	Emergency DALI	Emergency MC-1	Emergency MC-3	Flicker Free
0321003L226	D-LED-IP65-25w-2300lm/840	(0,4)	2300	25	92	4000K	100°	✓	✓	✓	✓	YES
0321003L236	D-LED-IP65-25w-2300lm/840 TR EU	(0,4)	2300	25	92	4000K	100°	✓	✓	✓	✓	YES

- ✓ Under request: 3000K, 6000K.
- ✓ Expander frame.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.