





WALL WASHER LED DOBLE ASYM



Mounting	Wall Washer.
Light source	LED
Optical system	Opal diffuser. Option 3000K and 6000K.
Light distribution	Direct/Indirect.
Wiring	Electronic control gear (EEI=A). PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI)
Material	Body: Extruded aluminum. Diffuser: Opal.
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. No maintenance required. Careful with the environment, does not contain mercury.
Surface finish	Body: White color RAL 9003. Under request, Grey RAL 9006 or Black RAL 9005.

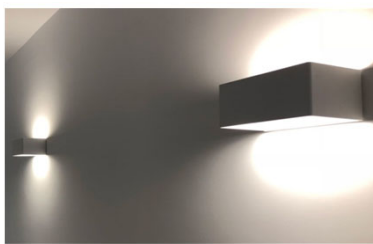

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Colour temperature CCT (K)	DIMM DALI
DAS01820B	DOBLE ASYM-150-6W 840Lm/840	(0,4)	840	6	140	4000	✓
DAS111K1B	DOBLE ASYM-290-6W 1100Lm/840	(0,6)	1100	6	183	4000	✓
DAS111K5B	DOBLE ASYM-290-9W 1500Lm/840	(0,6)	1500	9	167	4000	✓
DAS212K2B	DOBLE ASYM-570-12W 2200Lm/840	(1,0)	2200	12	183	4000	✓
DAS213K0B	DOBLE ASYM-570-18W 3000Lm/840	(1,0)	3000	18	167	4000	✓

Available colour temperature 3000K or 6000K.