





# SURFACE - SUSPENDED • LED




POSSIBILITY OF INDIVIDUAL ASSEMBLY AND FORMING CONTINUOUS LINES

## SURFACE-SUSPENDED NT50

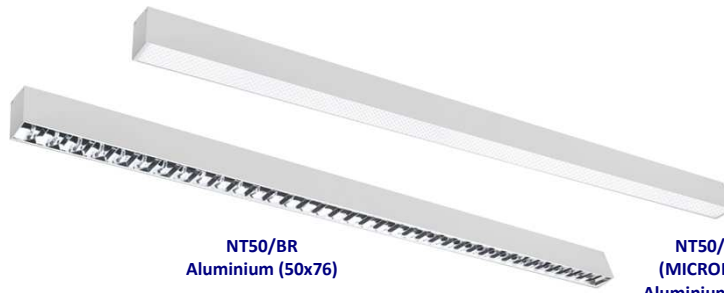




NT50/BR Aluminium (50x76)

NT50/MCR (MICROPRISM) Aluminium (50x76)



<b>Mounting</b>	Surface/suspended.
<b>Light source</b>	LED
<b>Optical system</b>	NT/50-BR: Bright double parabolic louvre NT/50-MCR: Microprismatic diffuser. 4000K (standard). Option 3000K and 5000K.
<b>Light distribution</b>	Direct.
<b>Wiring</b>	Electronic control gear (EEI=A++). PF>0,95 TRIDONIC. Possibility of incorporating dimmable electronic control gear (DALI), presence sensor and light sensor and/or emergency Kit (1 hour).
<b>Material</b>	Body: Extruded aluminum profile.
<b>Surface finish</b>	Body: Aluminium (RAL 9006).
<b>Benefits</b>	<b>Included: Electrification for continuous lines assembly.</b> LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous lighting throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. Does not require maintenance. Careful with the environment, it does not contain mercury.

4800 lm   120 lm/W   >80 Ra

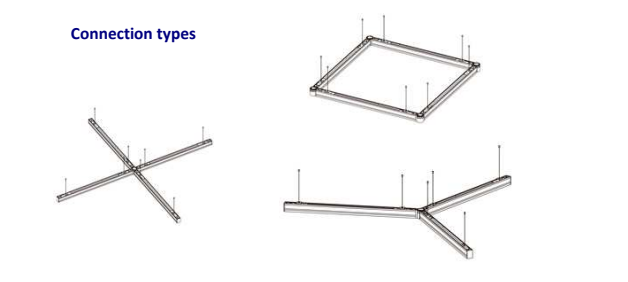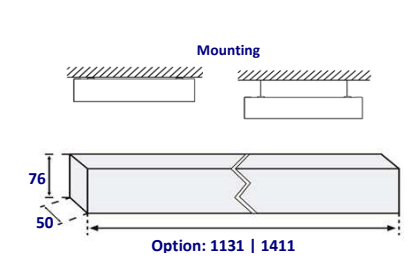

220-240V 50-60Hz   LED   ECG   EEI=A++   F   IP 20   AVAILABLE   ECG DALI

CODE	REFERENCE	Kg.	Light output	Power	Efficiency	Colour	Light sensor	DIMM	Emergency
			lm	W	lm/W	temperature	+ pres. detector	DALI	MC-1
N50313K4G	NT50/MCR/SLC-1131-32W 3400lm/840	(1,5)	3400	32	107	4000	✓	✓	✓
N50414K3G	NT50/MCR/SLC-1411-40W 4300lm/840	(1,5)	4300	40	108	4000	✓	✓	✓
N50323K8G	NT50/BR/SLC-1131-32W 3800lm/840	(2,5)	3800	32	119	4000	✓	✓	✓
N50424K8G	NT50/BR/SLC-1411-40W 4800lm/840	(2,5)	4800	40	120	4000	✓	✓	✓
15620002	ACC. SUSPENSION SET (2 UNITS)	-	-	-	-	-	-	-	-
15636L100	ACC. LIGHT + PRESEN SENSOR (control up to 10 lumin.)	-	-	-	-	-	-	-	-
N0LULC	ACC. LC-UNION-NT/50	-	-	-	-	-	-	-	-
N0LUA2X	ACC. ANGULAR-UNION-2X-NT/50	-	-	-	-	-	-	-	-
N0LUA3X	ACC. ANGULAR-UNION-3X-NT/50	-	-	-	-	-	-	-	-
N0LUA4X	ACC. ANGULAR-UNION-4X-NT/50	-	-	-	-	-	-	-	-

Covers and joints included. 3000K and 5000K, under request.

more information in [www.lux-may.com](http://www.lux-may.com)

LUX-MAY reserves the right to change product characteristics without notice.