

P/OPAL/L IP65


ES

Montaje: Empotrado.
 Fuente de luz: Módulos lineales LED SMD.
 Temperatura de color seleccionable: 3000K, 4000K, 6000K.
 Sistema óptico: Difusor opal.
 Distribución luminosa: Directa.
 Equipo eléctrico: Equipo de control electrónico Tridonic. PF>0,95.
 Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).
 Materiales: Cuerpo: Acero galvanizado lacado en blanco con tratamiento anti-corrosivo según normas ENEC-10 y VDE. Difusor: Opal. Disponible, difusor microprismático.
 Acabado: Color blanco RAL 9003.



EN

Mounting: Recessed.
 Light source: LED linear modules SMD.
 Selectable temperature color: 3000K, 4000K, 6000K.
 Optical system: Opal diffuser.
 Light distribution: Direct.
 Electrical equipment: Tridonic electronic control gear. PF> 0,95.
 Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h).
 Materials: Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Opal. Available, microprismatic diffuser.
 Surface finish: White color RAL 9003.

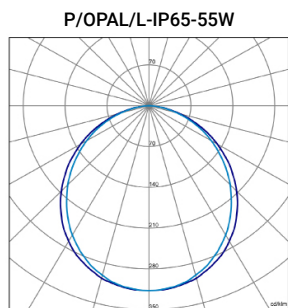



SALAS BLANCAS
 CLEAN ROOM

CCT SELECTABLE
 TEMPERATURE COLOR



RAPIDA FIJACION AL TECHO
FAST FIXING TO THE CEILING

Incluye junta de goma para un óptimo sellado entre luminaria y techo. Includes rubber gasket for optimal sealing between luminaire and ceiling.

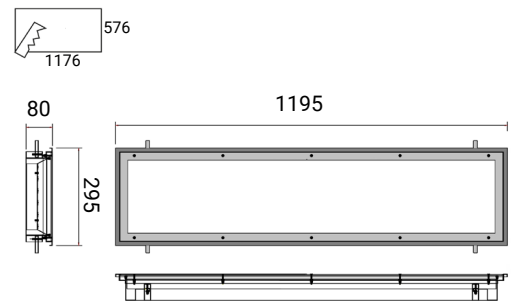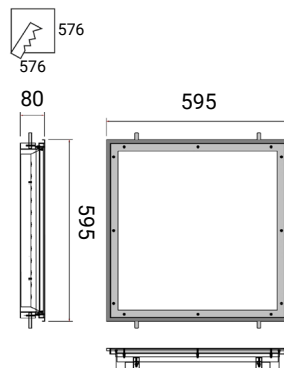

ESTANDAR/STANDARD

- 5 AÑOS
5 YEARS
- 220-240V
50-60Hz
- IP 65
- IK 04
- CLASE I
CLASS I
- 50.000h
L80B10
- 20°
+40°
- CRI 80
- 3000K
4000K
6000K

DISPONIBLE/AVAILABLE

CONFIGURACION ONLINE ONLINE CONFIGURATION

- EMERGENCY
- 1-10V
DALI
- 1h
3h



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
P6O224KCB	P/OPAL/L-IP65-44W 5000Lm/830-840-860 (596x596)	9,2	44W	5000	113 lm/W	3000, 4000, 6000
P6O225KCB	P/OPAL/L-IP65-50W 5650Lm/830-840-860 (596x596)	9,2	50W	5650	113 lm/W	3000, 4000, 6000
P6O227KCB	P/OPAL/L-IP65-55W 6250Lm/830-840-860 (596x596)	9,2	55W	6250	113 lm/W	3000, 4000, 6000
P6O314KCB	P/OPAL/L-IP65-44W 5000Lm/830-840-860 (1196x296)	9,2	44W	5000	113 lm/W	3000, 4000, 6000
P6O315KCB	P/OPAL/L-IP65-50W 5650Lm/830-840-860 (1196x296)	9,2	50W	5650	113 lm/W	3000, 4000, 6000
P6O317KCB	P/OPAL/L-IP65-55W 6250Lm/830-840-860 (1196x296)	9,2	55W	6250	113 lm/W	3000, 4000, 6000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h ACCESORIO PARA EMPOTRAR/ACCESORY FOR RECESS DIFUSOR MICROPRISMATICO/MICROPRISMATIC DIFFUSER REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP) DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)