


Lux-May

RECESSED • LED



RECESSED LED
PKLED/BR




UGR<18
No Flicker

PKLED/BR

35W - 4500lm
46W - 5400lm

Mounting	Recessed.
Light source	LED linear modules SMD
Optical system	Bright parabolic aluminum reflector.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A+). PF>0,95 Possibility of incorporating dimmable electronic control gear (1-10V or DALI) and/or emergency Kit (1 or 3 hours). Optional, no flicker.
Material	Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Bright parabolic aluminum with parabolic cross louvre.
Surface finish	Body: White colour.
Accessories	Under request, springs for plaster ceilings, accessory for recessed in plaster, Custom accessories for asymmetric hidden ceilings, clip-in, ...
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average life service >50.000 hours. Does not require maintenance. Careful with the environment, it does not contain mercury.

5400 lm
129 lm/W
>80 Ra

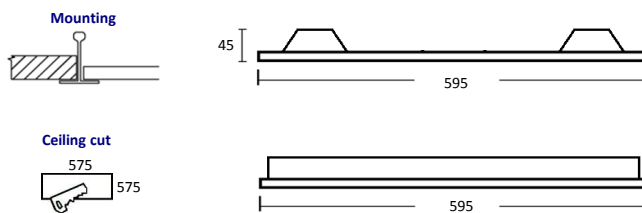


CODE	REFERENCE	Kg.	Light output	Power	Efficiency	Colour temperature	DIMM		Emergency		No flicker
							1-10V	DALI	MC-1	MC-3	
LEK21L450	PKLED/BR-38W 4500lm/840 LM	(3,8)	4500 lm	35 W	129 lm/W	4000 CCT (K)	✓	✓	✓	✓	-
LEK20L450	PKLED/BR-38W 4500lm/840 PH/TR	(3,8)	4500	35	129	4000	✓	✓	✓	✓	✓
LEK20L540	PKLED/BR-46W 5400lm/840 TR	(3,8)	5400	46	117	4000	✓	✓	✓	✓	yes
LEKAL001	ACC. RECESSED PKLED/BR 600x600	-	-	-	-	-	-	-	-	-	-
LEPAL000	ACC. SURFACE PKLED/BR 600x600	-	-	-	-	-	-	-	-	-	-
0092301050	ACC. PLASTER SPRINGS PKLED (4 UNITS)	-	-	-	-	-	-	-	-	-	-
LEK10L002	ACC. INCREASE FLICKER FREE	-	-	-	-	-	-	-	-	-	-

✓ Under request, custom accessories for asymmetric hidden ceilings, clip-in, ...



UGR<18
No Flicker

SURFACE LED PKLED/BR



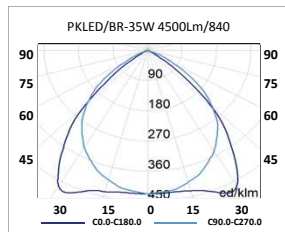


PKLED/BR + SURFACE ACCESSORY

35W - 4500lm
46W - 5400lm

Mounting	Surface.	 Driver
Light source	LED linear modules SMD	
Optical system	Bright parabolic aluminum reflector.	
Light distribution	Direct.	
Wiring	Electronic control gear. PF>0,95 Possibility of incorporating dimmable electronic control gear (1-10V or DALI) and/or emergency Kit (1 or 3 hours). Optional, no flicker.	
Material	Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Bright parabolic aluminum with parabolic cross louvre.	 1-10V Light sensor, under request. DALI Light sensor and presence detector, under request.
Surface finish	Body: White colour.	
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous illumination throughout the projection area. Low consumption and high efficiency. Average life service >50.000 hours. Does not require maintenance. Careful with the environment, it does not contain mercury.	

5400 lm
129 lm/W
>80 Ra

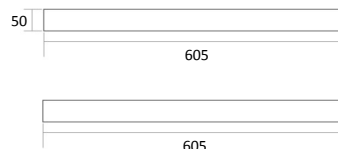

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED + Driver lm/W	Colour temperature CCT (K)	DIMM		Emergency		No flicker
							1-10V	DALI	MC-1	MC-3	
LEK21L450	PKLED/BR-38W 4500lm/840 LM	(5,3)	4500	35	129	4000	✓	✓	✓	✓	-
LEK20L450	PKLED/BR-38W 4500lm/840 PH/TR	(5,3)	4500	35	129	4000	✓	✓	✓	✓	✓
LEK20L540	PKLED/BR-46W 5400lm/840 TR	(5,3)	5400	46	117	4000	✓	✓	✓	✓	yes
LEPAL000	ACC. SURFACE PKLED/BR 600x600	-	-	-	-	-	-	-	-	-	-
LEK10L002	ACC. INCREASE FLICKER FREE	-	-	-	-	-	-	-	-	-	-