


Lux-May

FREE STANDING LUMINAIRE • LED





STANDLUX 51W-7650 lm



- DIRECT AND INDIRECT LIGHTING
- DIMMABLE LED LIGHTING
- 150 lm/w

Mounting	Free standing luminaire.
Light source	Linear LED modules SMD Available: 3000K, 4000K.
Optical system	Direct lighting: Microprismatic diffuser. Indirect lighting: Opal.
Light distribution	Direct and indirect.
Wiring	Electronic control gear (EEI=A+). PF>0,95. Dimmable electronic control gear (DALI) incorporated.
Material	Body: Die-cast aluminum. Base: Steel. Diffuser: Microprismatic (direct lighting). Diffuser: Opal (indirect lighting). Luminaire height: 2 m. Color RAL 9006.
Benefits	Free standing luminaires can be positioned in any location in the room, at any position relative to the task area. LED luminaire with integrated electronic control gear. Touch dim and proportional switch to change a ratio of direct and indirect lighting. Indirect/direct light can be switched/dimmed separately. Colour rendering index Ra>80. Low consumption and high efficiency. No maintenance required. Careful with the environment, it does not contain mercury.

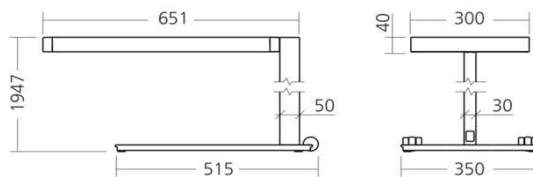

CODE	REFERENCE	kg	Light Output lm	Power W	Efficiency LED + Driver lm/W	Colour temperature CCT (K)	Light distribution	
							Direct	Indirect
STA003L0764	STANDLUX-51W DALI-7650lm/830	(12,5)	7650	51	150	3000	SI	SI
STA003L0765	STANDLUX-51W DALI-7650lm/840	(12,5)	7650	51	150	4000	SI	SI
STA003L1174	STANDLUX-85W DALI-11750lm/830	(12,5)	11750	85	138	3000	SI	SI
STA003L1175	STANDLUX-85W DALI-11750lm/840	(12,5)	11750	85	138	4000	SI	SI

STASENSOR ACC. Light sensor and presence detector.