




Lux-May

RECESSED INDIRECT • LED





RECESSED INDIRECT
LD/L



LD/L



Mounting	Recessed.
Lamps	LED OSRAM/TRIDONIC. Temperature color 4000K. Under request, 3000K.
Optical system	Diffuser.
Light distribution	Indirect.
Wiring	Electronic control gear EEI=A2. PF>0,95. OSRAM/TRIDONIC/HELVAR. Possibility of incorporating dimmable electronic control gear (1-10V or DALI) and/or emergency Kit (1 or 3 hours).
Material	Body: White enameled steel. High torsional strength and guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Microperforated. Simple assembly and easy installation, for its quick accessibility to the connection terminal.
Surface finish	Body: Epoxy-polyester in white opaque and satin anti-glare. Stable to ultraviolet and anti-yellowing radiations.
Benefits	LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous lighting throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. Does not require maintenance. Careful with the environment, it does not contain mercury.

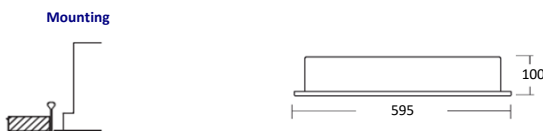

CODIGO	REFERENCIA	Kg.	Power	Efficiency LED module + Driver	Dimming		Emergency	
					1-10V	DALI	MC-1	MC-3
LDL223K8B	LDL-25W 3800lm/840	(4,5)	25	152	✓	✓	✓	✓
LDL224K8B	LDL-32W 4800lm/840	(4,5)	32	150	✓	✓	✓	✓
154331L001	ACC. SURFACE FRAME LD/L	-	-	-	-	-	-	-
LEKAL001	ACC. RECESSED FRAME LD/L	-	-	-	-	-	-	-

Note: Only valid for modular ceilings 600X600mm.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.