





WATERPROOF FITTINGS T5 IP65 • H.F.

UNBREAKABLE
POLYCARBONATE


WATERPROOF FITTING T5 T5/RPC

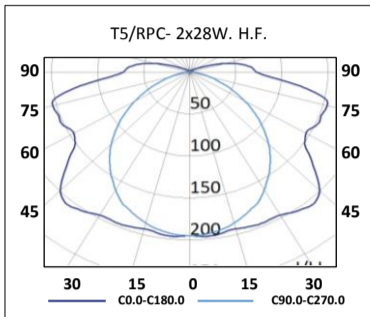

Mounting	Surface.
Lamps	T5
Optical system	Resistant to UVA rays diffuser / White reflector.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A2). PF>0,95 Possibility of incorporating dimmable electronic control gear (EEI=A1 1-10V or DALI).
Material	Body: Unbreakable polycarbonate. Ultra-compact waterproof luminaire. Diffuser: Injected unbreakable polycarbonate with longitudinal prismatic stripes. Reflector: Cold rolled steel, lacquered in white epoxy-polyester. Clips: Stainless steel included.
Surface finish	Body: Grey with efficient polyurethane gasket.




INOX CLAMP
INCLUDED



SUSPENSION SET
INCLUDED

Mounting

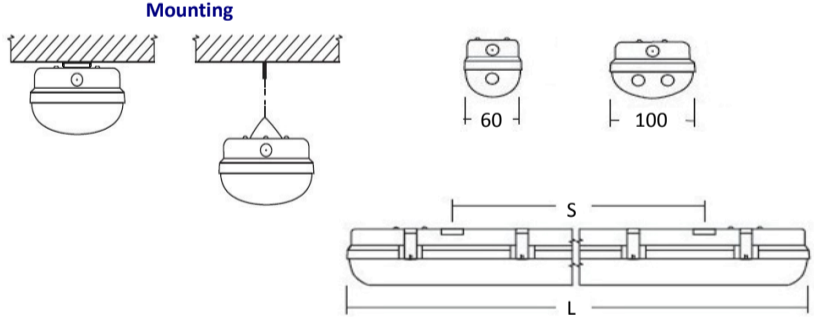

	L	S
1x14W./1x24W.	610	372
1x28W./1x54W.	1210	860
1x35W./1x49W./1x80W.	1510	955
2x28W./2x54W.	1210	860
2x35W./2x49W.	1510	955

AVAILABLE

CODE	REFERENCE	Kg.	Power	Lamp	Lampholder	DIMM		Emergency	
						1-10V	DALI	MC-1	MC-3
01237013114	T5/RPC-1x14W H.F.	(0,8)	14	T5	G5	✓	✓	-	-
01237013124	T5/RPC-1x24W H.F.	(0,8)	24	T5	G5	✓	✓	-	-
01237013128	T5/RPC-1x28W H.F.	(1,6)	28	T5	G5	✓	✓	✓	✓
01237013154	T5/RPC-1x54W H.F.	(1,6)	54	T5	G5	✓	✓	✓	✓
01237013135	T5/RPC-1x35W H.F.	(2,2)	35	T5	G5	✓	✓	✓	✓
01237013149	T5/RPC-1x49W H.F.	(2,2)	49	T5	G5	✓	✓	✓	✓
01237013180	T5/RPC-1x80W H.F.	(2,2)	80	T5	G5	✓	✓	✓	✓
01237013228	T5/RPC-2x28W H.F.	(2,2)	56	T5	G5	✓	✓	✓	✓
01237013254	T5/RPC-2x54W H.F.	(2,2)	108	T5	G5	✓	✓	✓	✓
01237013235	T5/RPC-2x35W H.F.	(2,9)	70	T5	G5	✓	✓	✓	✓
01237013249	T5/RPC-2x49W H.F.	(2,9)	98	T5	G5	✓	✓	✓	✓