



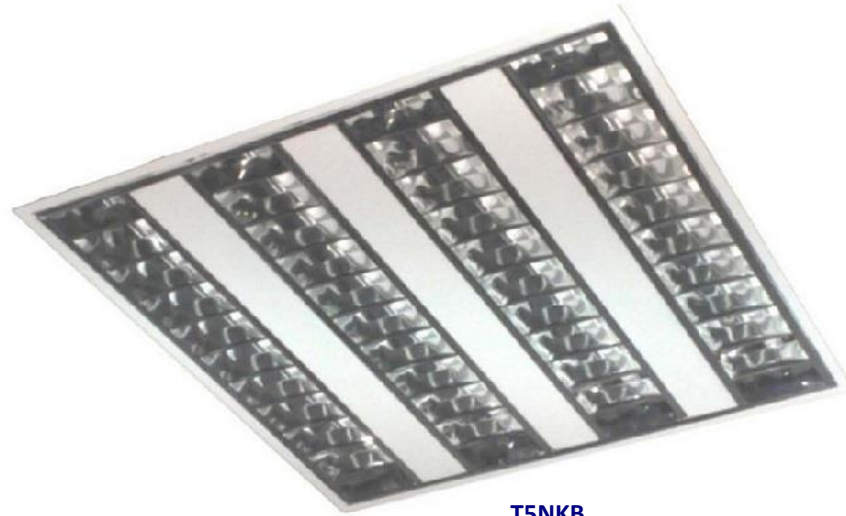


POLYVALENT RECESSED T5 • H.F. LOW LUMINANCE


RECESSED
T5NKB (BRIGHT)
T5NK (MATT)

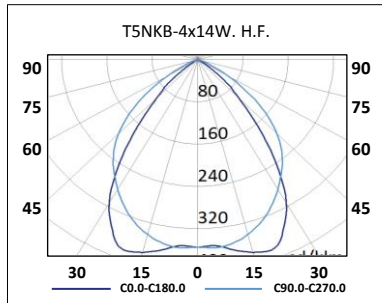



T5NKB

Mounting	Recessed. Armstrong ceilings, plaster, plasterboard (polyvalent).
Lamps	T5  840 tubes included.
Optical system	Bright double parabolic diffuser (T5NKB), matt double parabolic (T5NK).
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A2). PF>0,95 Under request, dimmable electronic control gear (EEI=A1 1-10V or DALI). Possibility of incorporating emergency Kit (1 or 3 hours).
Material	Body: Lacquered steel in white. High torsional strength and guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE Standards. Diffuser: Bright double parabolic aluminum (T5NKB model) for low luminance ceilings. Matt double parabolic aluminum (T5NK model).
Surface finish	Body: Painted in white epoxy-polyester RAL 9003.

Mounting

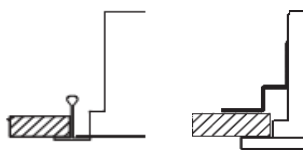

Ceiling cut

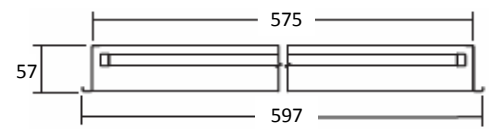

UNDER REQUEST



CODE	REFERENCE	Kg.	Power	Lamp	Lampholder	Emergency	
						MC-1	MC-3
1372623414L	T5NKB(BRIGHT)-4x14W H.F. + 840 Tubes	(3,0)	W 56	T5	G5	✓	✓
1372613414L	T5NK(MATT)-4x14W H.F. + 840 Tubes	(3,0)	56	T5	G5	✓	✓

Armstrong ceilings 600x600 / Smooth palster.
Brackets for plaster ceilings (4 units set) included.
T5 fluorescent tubes 840 colour included.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.