




RECESSED LOW PROFILED • LED






RECESSED LED
T57/OPAL LED



POSSIBILITY OF
INDIVIDUAL ASSEMBLY
AND FORMING
CONTINUOUS LINES


T57/OPAL LED
Perfil aluminio (58x68)

Mounting	Recessed. Ceilings plaster, plasterboard.	 <p>Sensor</p>
Light source	LED  SMD-TRIDONIC.	
Optical system	Opal diffuser. 4000K (standard). Option 3000K and 5000K.	
Light distribution	Direct.	
Wiring	Electronic control gear (EEI=A++). PF>0,95 TRIDONIC. Possibility of incorporating dimmable electronic control gear (DALI) and/or emergency Kit (1 hour). Presence sensor, light sensor.	
Material	Body: Extruded aluminum profile. Diffuser: Opal thermoplastic material. Fixing pieces, cover and joint included.	
Surface finish	Body: White colour RAL 9003. Under request, RAL 9006, RAL 9005.	




Ceiling cut

T57/OPAL-LED-570:	570mm
T57/OPAL-LED-1130:	1130mm
T57/OPAL-LED-1410:	1410mm

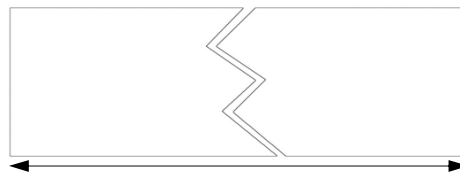







T57/OPAL-LED-570:	570mm
T57/OPAL-LED-1130:	1130mm
T57/OPAL-LED-1410:	1410mm



AVAILABLE



CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Light sensor + pres. detector	DIMM DALI	Emergency MC-1
T57211K8B	 T57/OPAL-LED-570-16W-2540lm/840	(1,7)	2540	16	159	✓	✓	✓
T57213K6B	 T57/OPAL-LED-570-24W-3600lm/840	(1,7)	3600	24	150	✓	✓	✓
T57313K6B	 T57/OPAL-LED-1130-32W-5080lm/840	(2,7)	5080	32	159	✓	✓	✓
T57317K2B	 T57/OPAL-LED-1130-48W-7200lm/840	(2,7)	7200	48	150	✓	✓	✓
T57414K5B	 T57/OPAL-LED-1410-40W-6350lm/840	(3,2)	6350	40	159	✓	✓	✓
T57419K0B	 T57/OPAL-LED-1410-60W-9000lm/840	(3,2)	9000	60	150	✓	✓	✓

Fixing pieces, cover and joint included. Other measurements, under request.

3000K and 5000K, under request.

* Light sensor + presence controls up to 10 luminaires.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.