



# Lux-May

## POLYVALENT RECESSED T5 • H.F. LOW LUMINANCE

POLYVALENT RECESSED T5  
T55/ULBR, T55/UBBR  
T55/UB, T55/UL  
T55/UMBR


UGR<17





T55/UBBR




T55/UB

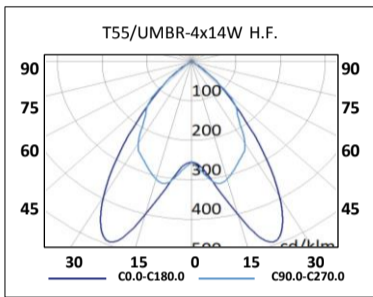

T55/UMBR

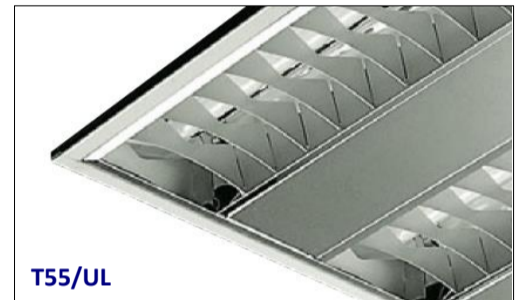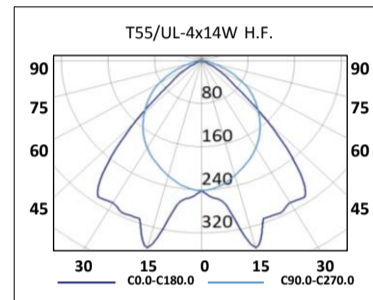

T55/UL

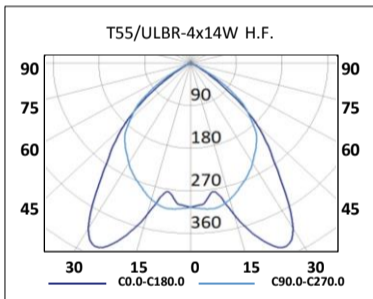


T55/ULBR





# POLYVALENT RECESSED T5 • H.F.

**POLYVALENT RECESSED T5**  
**T55/ULBR, T55/UBBR**  
**T55/UB, T55/UL**  
**T55/UMBR**

## LOW LUMINANCE

<b>Mounting</b>	Recessed. Armstrong ceilings, plaster, plasterboard (polyvalent).
<b>Lamps</b>	T5 
<b>Optical system</b>	Parabolic diffuser, double parabolic cross blades (T55/ULBR, T55/UBBR). Parabolic diffuser, flat plates cross blades (T55/UB, T55/UL). Double parabolic bright aluminum diffuser (T55/UMBR).
<b>Light distribution</b>	Direct.
<b>Bright</b>	Electronic control gear (EEI=A2). PF>0,95 Possibility of incorporating dimmable electronic control gear (EEI=A1 1-10V or DALI) and/or emergency Kit (1 or 3 hours).
<b>Material</b>	Body: White enameled steel. High resistance to torsion and guaranteed minimum thickness of 0.6mm, according to ENER-10 and VDE standards. Diffuser: Very low luminance bright double parabolic aluminum (T55/ULBR, T55/UBBR, T55/UMBR). Bright blades aluminum (T55/UB, T55/UL). Embellisher: Smooth, aluminum bright (T55/ULBR), enameled in white (T55/UBBR). Smooth enameled in white (T55/UB), smooth bright aluminum (T55/UL). Lacquered in white and micro perforated (T55/UMBR).
<b>Surface finish</b>	Painted in white epoxy-polyester RAL 9016. Under request, other RAL colours.

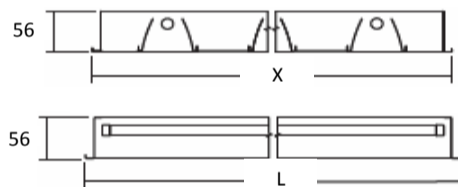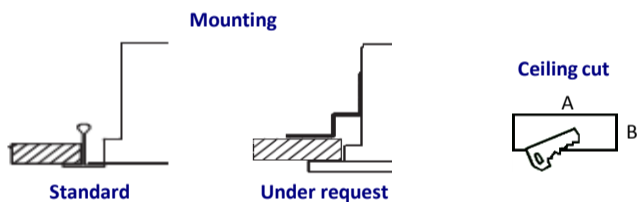

	X	L	Ceiling cut	
			A	B
<b>2x28 / 2x54W.</b>	295	1195	1175	275
<b>3x14 / 3x24 / 4x14 / 4x24W.</b>	595	595	575	575
<b>3x28 / 4x28W.</b>	595	1195	1175	575



AVAILABLE



CODE	REFERENCE	Kg.	Power	Lamp	Lampholder	DIMM		Emergency	
						1-10V	DALI	MC-1	MC-3
			W						
1372123228	<b>T55/ULBR-2x28W H.F.</b>	(3,8)	56	T5	G5	✓	✓	✓	✓
1372123254	<b>T55/ULBR-2x54W H.F.</b>	(3,8)	108	T5	G5	✓	✓	✓	✓
1372123314	<b>T55/ULBR-3x14W H.F.</b>	(3,8)	42	T5	G5	✓	✓	✓	✓
1372123324	<b>T55/ULBR-3x24W H.F.</b>	(3,8)	72	T5	G5	✓	✓	✓	✓
1372123414	<b>T55/ULBR-4x14W H.F.</b>	(3,8)	84	T5	G5	✓	✓	✓	✓
1372123424	<b>T55/ULBR-4x24W H.F.</b>	(3,8)	56	T5	G5	✓	✓	✓	✓
1372123328	<b>T55/ULBR-3x28W H.F.</b>	(6,1)	96	T5	G5	✓	✓	✓	✓
1372123428	<b>T55/ULBR-4x28W H.F.</b>	(6,1)	112	T5	G5	✓	✓	✓	✓
1370003228	<b>T55/UB-2x28W H.F.</b>	(3,8)	64	T5	G5	✓	✓	✓	✓
1370003254	<b>T55/UB-2x54W H.F.</b>	(3,8)	108	T5	G5	✓	✓	✓	✓
1370003314	<b>T55/UB-3x14W H.F.</b>	(3,8)	42	T5	G5	✓	✓	✓	✓
1370003324	<b>T55/UB-3x24W H.F.</b>	(3,8)	72	T5	G5	✓	✓	✓	✓
1370003414	<b>T55/UB-4x14W H.F.</b>	(3,8)	56	T5	G5	✓	✓	✓	✓
1370003424	<b>T55/UB-4x24W H.F.</b>	(3,8)	96	T5	G5	✓	✓	✓	✓
1370003328	<b>T55/UB-3x28W H.F.</b>	(6,1)	84	T5	G5	✓	✓	✓	✓
1370003428	<b>T55/UB-4x28W H.F.</b>	(6,1)	112	T5	G5	✓	✓	✓	✓
137233228	<b>T55/UMBR-2x28W H.F.</b>	(4,2)	56	T5	G5	✓	✓	✓	✓
137233254	<b>T55/UMBR-2x54W H.F.</b>	(4,2)	108	T5	G5	✓	✓	✓	✓
137233314	<b>T55/UMBR-3x14W H.F.</b>	(4,2)	42	T5	G5	✓	✓	✓	✓
137233324	<b>T55/UMBR-3x24W H.F.</b>	(4,2)	72	T5	G5	✓	✓	✓	✓
137233414	<b>T55/UMBR-4x14W H.F.</b>	(4,2)	56	T5	G5	✓	✓	✓	✓
137233424	<b>T55/UMBR-4x24W H.F.</b>	(4,2)	96	T5	G5	✓	✓	✓	✓
137233328	<b>T55/UMBR-3x28W H.F.</b>	(6,5)	84	T5	G5	✓	✓	✓	✓
137233428	<b>T55/UMBR-4x28W H.F.</b>	(6,5)	112	T5	G5	✓	✓	✓	✓
0092301047	<b>ACC. BRACKETS FOR SMOOTH PLASTER CEILINGS</b> (UNDER REQUEST, 4 UNITS SET)	-	-	-	-	-	-	-	-