



EXTRA FLAT SLIM BATTENS • LED



Materials: Aluminum body, opal thermoplastic diffuser.

CODE	REFERENCE	lm	W	Efficiency lm/W	Kg.
RS1L475	SLIM-LED 475 3000K	420	6,7	63	(0,5)
RS1L476	SLIM-LED 475 4200K	420	6,7	63	(0,5)
RS1L625	SLIM-LED-625 3000K	550	8,4	65	(0,6)

Electronic control gear


High performance LED, 40.000hrs/average service life

Reduced height 23 mm.



Blister packing.



BLISTER PACKAGING
"Reduced height 23 mm"



Length L
SLIM-LED 475 - 475mm
SLIM-LED 475 - 625mm

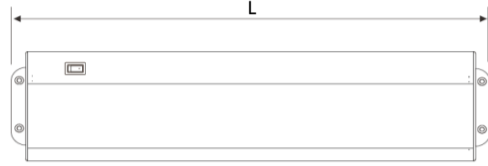

EXTRA MINI BATTENS • LED



Material: Aluminium body, opal thermoplastic diffuser.

CODE	REFERENCE	lm	W	lm/W	Kg.
RT1L860	TLH-LED-860	424	6,2	68	(0,5)
RT1L0001	TLH-LED-CONNECTOR 500mm.	-	-	-	-

Electronic control gear.


High performance LED, 40.000hrs/Average service life

Reduced height 36 mm.



Blister packaging.



BLISTER PACKAGING
"Reduced height 36 mm"



Length L
TLH-LED 860 - 860mm

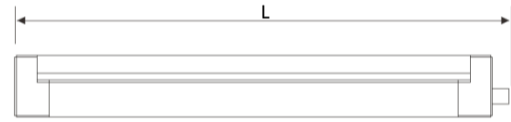

Material: Aluminium body, opal thermoplastic diffuser.

CODE	REFERENCE	lm	W	Efficiency lm/W	Kg.
RT2L860	TLX-LED-860	980	12	82	(0,3)
RT2L1200	TLX-LED-1200	1400	16	88	(0,4)

Electronic control gear.

High performance LED, 40.000hrs/Average service life

Reduced height 33 mm.



Blister packaging.




BLISTER PACKAGING
"Reduced height 33 mm"



Length L
TLX-LED 860 - 860mm
TLX-LED 1200 - 1200mm

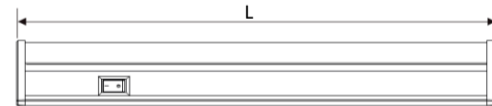

EXTRA MINI BATTENS



Materials: Thermoplastic body, prismatic methyl methacrylate diffuser.


CODE	REFERENCE	lm	W	Efficiency lm/W	Kg.
0022513813	TKL-13	800	13	62	(0,4)
0022513818	TKL-18	860	18	48	(0,5)

Electronic control gear.



Blister packaging.



Regleta mini
BLISTER PACKAGING



Length L
TKL-13 - 575mm
TKL-18 - 605mm

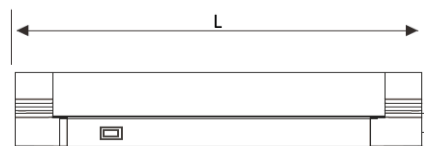

more information in www.lux-may.com