




RECESSED LOW PROFILED • LED




POSSIBILITY OF INDIVIDUAL ASSEMBLY AND FORMING CONTINUOUS LINES

RECESSED
T56/OPAL



T56/OPAL
Aluminum profile (39x65)

Mounting	Recessed. Ceilings plaster, plasterboard.
Light source	LED SMD-TRIDONIC.
Light distribution	Opal diffuser. 4000K (standard). Option 3000K, 5000K and 6000K.
Wiring	Electronic control gear (EEI=A++). PF>0,95 TRIDONIC. Possibility of incorporating dimmable electronic control gear (DALI) and/or emergency Kit (1 hour). Presence sensor, light sensor.
Material	Body: Extruded aluminum profile. Fixing pieces, cover and joint included.
Surface finish	Body: White colour RAL 9003. Under request, RAL 9006, RAL 9005.

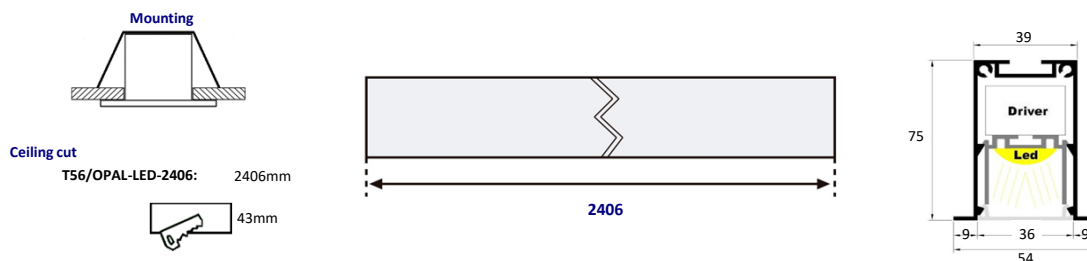

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Light sensor + pres. detector	DIMM DALI	Emergency MC-1
-----	T56/OPAL-2406-40W-6350lm/840 DALI IP44	(2,9)	6350	40	159	✓	OK	✓
15636L100	ACC. LIGHT + MOTION SENSOR (control up to 10 lum.)	-	-	-	-	-	-	-
1563610L000	INC. ELECTRIFICATION 3 PINES	-	-	-	-	-	-	-

Covers and joints included. 3000K , 5000K y 6000K, under request.

✓ Under request.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.