

# exclusive Range RECESSED DOWNLIGHTS *Lux-May*


## LUXUS




**LUMINAIRE HOUSING:** Made of high quality 0,6 mm trimmed, galvanized steel sheet. White (standard), grey (optional)  
 Square ring made in enamelled steel sheet with thermo-hardened UV resistant powder coat.  
 Installation using tension clips. WIELAND connector is optional.

According to Norm ENEC-10/VDE.  
**OPTIC:** High specular faceted polished reflector made of pure aluminium, silver coated by vapour deposition. Covered by transparent glass (Mod. LUXUS), opal glass (Mod. LUXUS/OPAL).  
 Reflector is precision formed to render very high light efficiency.



**LUXUS 269/OPAL - 1x32W**




**LUXUS 269/OPAL - 2x26W**




## LUXUS 243/OPAL LUXUS 269/OPAL

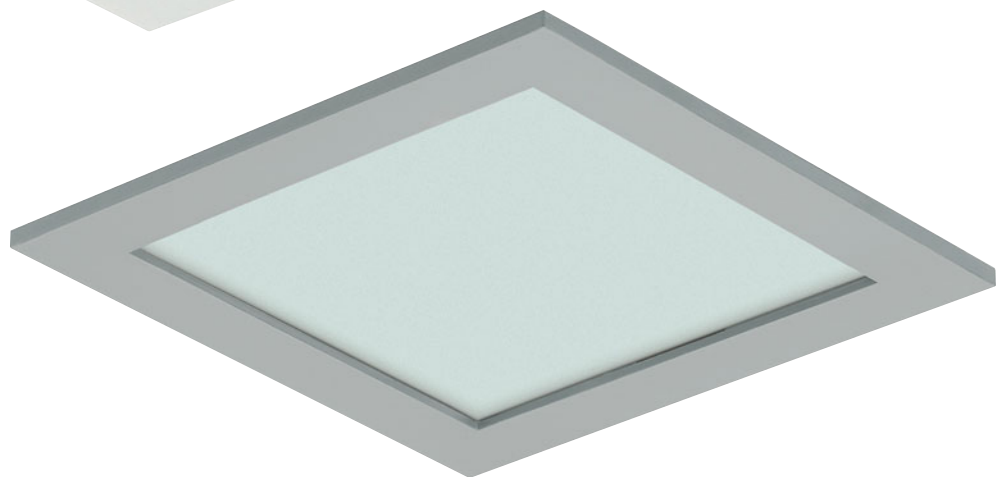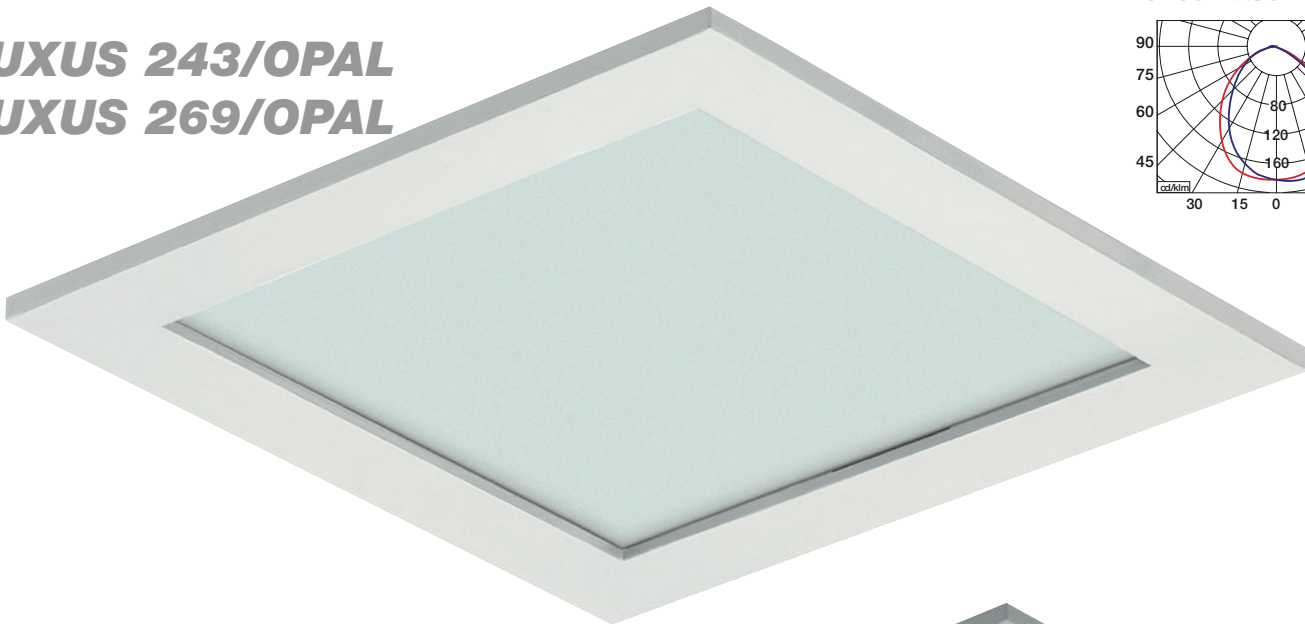

### DIMENSIONS

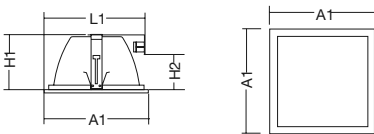

### MOUNTING



	W.	Lamp	Dimensions				Hole	
			A1	L1	H1	H2	O1	O2
exclusive LUXUS - 243/OPAL-IP43	1 x 13	TC-DEL	243	253	148	70	231	231
exclusive LUXUS - 243/OPAL-IP43	1 x 18	TC-DEL	243	253	148	70	231	231
exclusive LUXUS - 243/OPAL-IP43	1 x 26	TC-DEL	243	253	148	70	231	231
exclusive LUXUS - 243/OPAL-IP43	2 x 13	TC-DEL	243	253	148	70	231	231
exclusive LUXUS - 243/OPAL-IP43	2 x 18	TC-DEL	243	253	148	70	231	231
exclusive LUXUS - 269/OPAL-IP43	1 x 18	TC-DEL	270	280	162	110	257	257
exclusive LUXUS - 269/OPAL-IP43	1 x 26	TC-DEL	270	280	162	110	257	257
exclusive LUXUS - 269/OPAL-IP43	1 x 32	TC-TEL	270	280	162	110	257	257
exclusive LUXUS - 269/OPAL-IP43	1 x 42	TC-TEL	270	280	162	110	257	257
exclusive LUXUS - 269/OPAL-IP43	2 x 18	TC-DEL	270	280	162	110	257	257
exclusive LUXUS - 269/OPAL-IP43	2 x 26	TC-DEL	270	280	162	110	257	257
exclusive LUXUS - 269/OPAL-IP43	2 x 32	TC-TEL	270	280	162	110	257	257